Key **Features**


10-point Multi-touch | Built-in Quad Core Media
Player with 16GB Storage | Embedded LAN, Wi-Fi,
and Browser | Internal Scheduler | Content
Management Software



Product **Description**

Content deployment, interactivity, and messaging couldn't be easier than with the ViewSonic CDM5500T. Featuring a 10-point touchscreen and internal media player, this commercial display gives you everything you need for easy interactive digital signage – right out of the box. Loaded with a powerful, high-performance processor and 16GB of storage (upgradeable to 32GB), the built-in media player ensures hours upon hours of smooth, high-definition multimedia content delivery. The CDM5500T also features built-in LAN / WiFi for easy connection to the internet for content delivery. Additional commercial features include an internal scheduler, tiling for video wall applications, and commercial construction for reliable messaging 24 hours a day, 7 days a week.

For more detailed information on how ViewSonic ViewBoards can best be utilized in a school environment, see our ViewBoard FAQs.

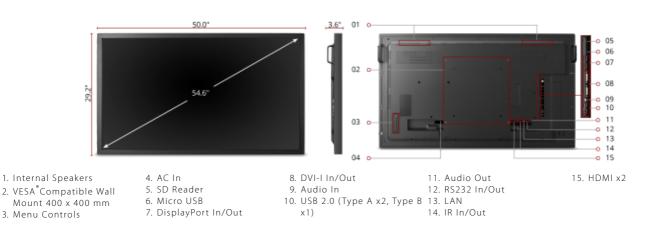



Display:

Display.	
Display Size (in.):	55
Viewable Area (in.):	54.6
Orientation:	Landscape / Portrait
Light Source:	ELED
Resolution:	1920 x 1080
Aspect Ratio:	16:9
Static Contrast Ratio:	1,100:1
Backlight Life (Hours):	50,000
Brightness:	450 cd/m2
Response Time (Typical GTG):	12ms
Viewing Angles:	178º horizontal, 178º vertical
Panel Surface:	3H Anti-glare, hard-coating
Operation Rating:	24/7
Embedded Player:	
CPU:	Quad core A9 CPU - RK3188

A 11	
Interface:	OSD / Remote Control
CPU:	Quad core A9 CPU - RK3188

Audio:

Connector:

HDMI 1.4(2), DVI-I(1), DVI-I Out(1), Display Port(1), Display Port Out(1), $3.5 mm \ Audio \ In(1), \ 3.5 mm \ Audio \ Out(1), \ Speaker \ Out(2), \ USB \ 2.0(2), \ RS232$ Out(1), Ethernet LAN (RJ45)(1)

Power:

Voltage:	100-240 VAC
Consumption (max):	130W
Consumption (typical):	75W
Stand-by:	<.5W

Controls:

On Screen Display:	Input, Volume, Backlight, Audio, Screen, Display, Adjust
Remote Control:	Volume, Channel, Source, Mute,

Back, Input, Menu

Operating Conditions:

Temperature:	41-104° F (5 - 40° C)
Humidity (non-condensing):	10-90%

Touch:

Maialet (mastria	١.	
Touch Points:		10-Point Touch
Touch Technolog	gy:	Infrared

Weight (metric):

Net (kg):	35.1
Net Without Stand (kg):	31
Gross (kg):	39.6

Weight (imperial):

G	ross (lbs):	87.3
Ν	et Without Stand (lbs):	68.3
Ν	et (lbs):	77.3

Dimensions (metric) (WxHxD):

Packaging (mm):	1448 x 952 x 223
Physical (mm):	1271 x 809 x 400

Dimensions (imperial) (WxHxD):

Packaging (in.):	54.0 x 37.4 x 8.7
Physical (in.):	50 x 29.2 x 3.6

Mount:

VESA Compatible: 400 x 400 mm

General:

Warranty: Three-year limited warranty on parts, labor and backlight

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws

PACKAGE CONTENTS: CDM5500T, Remote control, User Manual, Quick Start Guide, power cables, RS232 cable, IR sensor cable, RS232 daisy chain cable

Regulations: UL/cUL, FCC, Energy Star 7.0, UL-MX-CoC, Mexico Energy

UPC: 766907898316

Accessories:

CD-EW-55-01, CD-EW-55-02, LB-STND-005-3, NMP012, NMP250-WL, NMP250-WU, NMP620-P10, NMP620-P10X, STND-044, STND-052, SW-071, SW-072, SW-073, SW-074, SW-090, SW-091, SW-092, SW-093, SW-094, SW-095, SW-096, VC10, VCB10, WMK-051, WMK-054, sw-014, sw-015

Awards:



Copyright © ViewSonic Corporation 2000-2018. All rights reserved. (10/03/2018 05:20 AM PST)