



**Immerse yourself in the game with the curved GB3467WQSU Red Eagle with FreeSync Premium**

The 1500R curved VA panel with 165Hz refresh rate, 0.4ms MPRT and the 3440x1440 resolution, guarantees superb image quality and a comfortable and very realistic viewing experience.

The height adjustable stand ensures total flexibility for your perfect screen position. Customize the screen settings using the predefined and custom gaming modes along with the Black Tuner function to give you total control over the dark scenes and make sure details are always clearly visible.



**CURVED DESIGN 1500R**

The 1500R curvature of the screen guarantees a realistic and comfortable viewing experience allowing you to really immerse yourself in the game.



**VA panel technology with 165Hz support and 0.4ms MPRT**

The monitor guarantees excellent contrast ratio making all the nuances between the light and dark colours clearly visible and provides an outstanding 0.4ms Moving Picture Response Time (MPRT) with 165Hz support.

## 01 DISPLAY CHARACTERISTICS

Diagonal	34", 86.4cm
Panel	VA LED, matte finish
Curved	1500R
Native resolution	3440 x 1440 @165Hz (4.9 megapixel UWQHD, DisplayPort)
Aspect ratio	21:9
Panel brightness	550 cd/m <sup>2</sup>
Static contrast	3000:1
Advanced contrast	80M:1
Response time (MPRT)	0.4ms
Viewing zone	horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89°
Colour support	16.7mIn 8bit
Horizontal Sync	30 - 160kHz
Viewable area W x H	797.22 x 333.72mm, 31.4 x 13.1"
Pixel pitch	0.232mm
Colour	matte, black

## 02 INTERFACES / CONNECTORS / CONTROLS

Signal input	HDMI x2 (v.2.0, max. 3440 x 1440 @100Hz) DisplayPort x2 (v.1.4, max. 3440 x 1440 @165Hz)
USB HUB	x4 (v.3.0 (DC5V, 900mA))
HDCP	yes
Headphone connector	yes

## 03 FEATURES

Blue light reducer	yes
Flicker free	yes
FreeSync support	HDMI: 3440 x 1440 @48-100Hz, DP: 3440 x 1440 @48-165Hz
HDR	400
OSD languages	EN, DE, FR, ES, IT, PT, RU, JP, CZ, NL, PL
Control buttons	joystick controller: Push (Menu), Up, Down, Left (i-Style Colour), Right (Blue Light Reducer) & buttons: Input, Volume+, Volume-, Power
User controls	picture adjust (contrast, brightness, OD, ACR, ECO, blue light reducer, black tuner, MBR, gamma), input select, audio adjust (volume, mute), store user settings, colour settings (colour temp., 6-Axis, user preset), image adjust (i-Style Colour, X-Res Technology, sharp and soft, HDMI RGB range, direct drive mode, video mode adjust), language, setup menu (OSD H. position, OSD V. position, OSD time, opening logo, HDR, FreeSync Premium, LED, DDC/CI, USB standby mode), display information, reset
Speakers	2 x 2W
Convenience	Kensington-lock™ prepared, DDC2B, Mac OSX

## 04 MECHANICAL

Display position adjustments	height, tilt
Height adjustment	150mm
Tilt angle	23° up; 5° down
VESA mounting	100 x 100mm

## 05 ACCESSORIES INCLUDED

Cables	power, USB, HDMI, DP
Other	quick start guide, safety guide

## 06 POWER MANAGEMENT


Power supply unit	internal
Power supply	AC 50 - 60V, 100/240Hz
Power usage	66W typical, 0.5W stand by, 0.3W off mode

## 07 SUSTAINABILITY

Regulations	CE, TÜV-Bauart, EAC, PSE, RoHS support, ErP, WEEE, VCCI, REACH, UKCA
Energy efficiency class (Regulation (EU) 2017/1369)	G
REACH SVHC	above 0.1%: Lead

## 08 DIMENSIONS / WEIGHT

Product dimensions W x H x D	809.5 x 435 (585) x 290mm
Box dimensions W x H x D	900 x 480 x 236mm
Weight (without box)	12.4kg
Weight (without stand)	9.4kg
EAN code	4948570121427

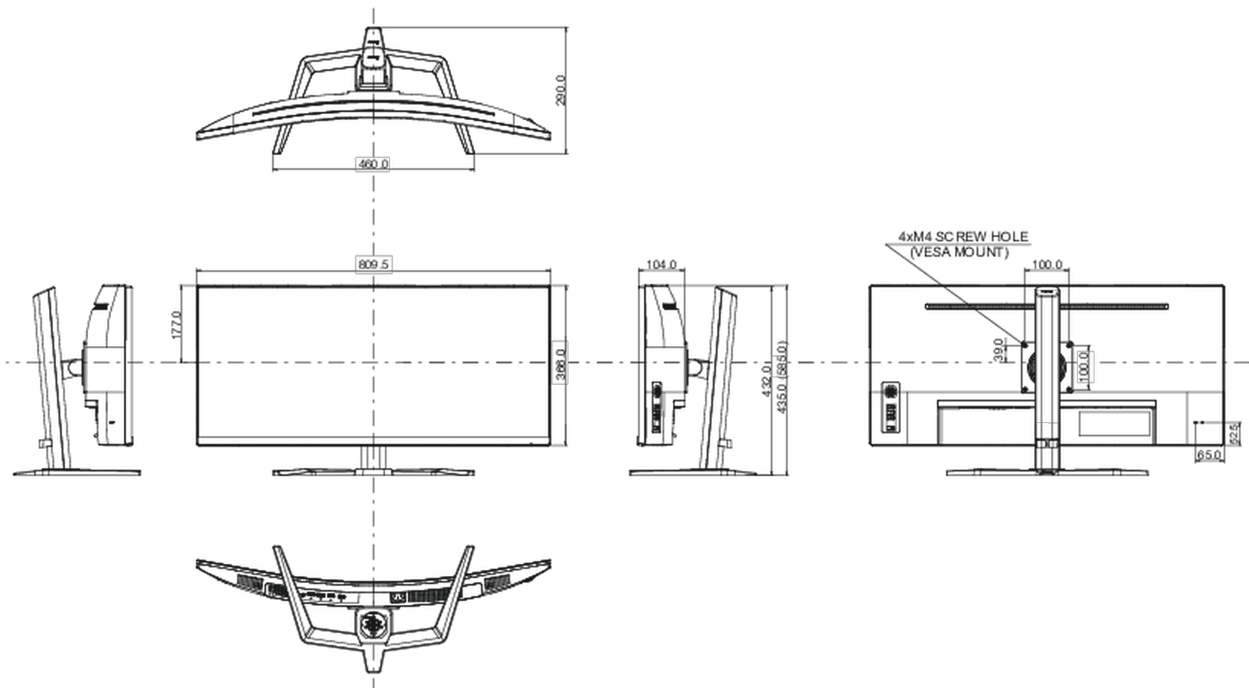

*All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.*

© IIYAMA CORPORATION. ALL RIGHTS RESERVED