ViewBoard IFP6533-G ViewBoard® 65" 4K Interactive Display - ViewSonic Europe

VIEWBOARD ViewBoard IFP6533-G

Key Features


ViewSonic 🎎

- Multi-tasking capabilities for enhanced lesson delivery.
- Embrace simplicity and organization with the USB-C one-cable solution, offering 65W of Power Delivery.
- Intuitive user interface and fast app launch for smooth operation.
- Powered by Android 13



Product **Description**

The ViewBoard IFP33-G Series harmonizes a touch display with versatile software to create a comprehensive classroom solution for interactive and engaging learning. This interactive flat panel delivers exceptional image quality in 4K UHD, thanks to cutting-edge bonding technology that provides clearer colors, enhanced contrast, and reduced glare. The 40-point touchscreen interface, equipped with Ultra Fine Touch Technology, empowers students and teachers to collaborate seamlessly, using either their fingers or dual-tip pens, for an intuitive pen-on-paper experience. Powerful built-in front-facing speakers and a USB-C port sort out for a complete and convenient multimedia experience. The ViewBoard IFP33-G Series is preinstalled with myViewBoard to offer advanced lesson delivery options for teachers and powerful device management tools for administrators.

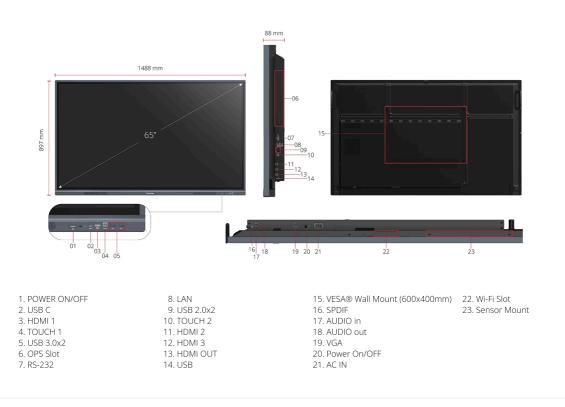

Visit Us

ViewBoard IFP6533-G ViewBoard® 65" 4K Interactive Display - ViewSonic Europe

	viewboard in 1 0555-6 viewboard	ue 05 4R interactive Display - viewe	
DISPLAY		EMBEDDED OS	
Panel Size:	65"	Android 13	
Panel Type:	TFT LCD Module with DLED	BUNDLE SOFTWARE	
	Backlight. IPS	Basic Annotation Software:	myViewBoard Whiteboard
Display Area (mm):	1428.48(H) × 803.52(V) (64.5" diagonal)	Pro Annotation Software:	myViewBoard for Windows (Embedded in optional Windows Slot-in PC)
Aspect Ratio:	16:9	Window Dresentation.	,
Resolution:	UHD 3840x2160(Pixels)	Wireless Presentation:	myViewBoard Display
Colors:	1.07B colors	Wireless Presentation with Touch Feedback: Viewboard Cast:	Yes
Brightness:	450 nits	SPECIAL FEATURES	
Contrast Ratio:	5000:1 (max. with DCR enabled)	All-in-one USB port:	(combine slot-in PC/Android/HDMI USB port)
Response Time:	8ms	·	Front "SmartPort™ USB" to all channels.
Viewing Angles:	H=178, V=178	Simple LAN sharing between IFP	
Backlight Life:	50,000 Hours (8 hours of use per day)	and slot-in device: Light Sensor:	PC Yes
Surface Treatment:	Hardness: 9H Anti-glare coating	POWER	
Orientation:	Landscape	Voltage:	100-240V AC
PLATFORM		Consumption:	On:99W ; Off: ≤ 0.5W
	Quad-core ARM Cortex	ERGONOMICS	
Processor:	(A55*4)	Wall Mount (VESA®):	600*400
RAM:	8GB DDR4	OPERATING CONDITIONS	
Storage:	128 GB	Temperature (° C):	0°C to 40°C
тоисн		Humidity:	20% ~ 80% RH non-
Type/ Tech:	Ultra Fine Touch Technology		condensing
Touch Point:	40 points touch	DIMENSIONS (W X H X D)	4400 007 00 450 0
INPUT		Physical (inch / mm):	1488 x 897 x 88 mm / 58.6 x 35.3 x 3.5 in
HDMI:	HDMI-IN 2.0 x 3 (3840x2160 @60Hz)	Packaging (inch / mm):	1628x1005x208 mm / 64.1x 39.6x 8.2in
RGB / VGA:	x1	WEIGHT	
Audio:	x1	Net (lb / kg):	77.1lb/34.95kg
RS232:	x1	Gross (Ib / kg):	98.5 lb/44.7kg
OPS:	x1 (Optional Intel Standard OPS)		
WiFi:	x1 (Optional VB-WIFI- 004/VSB-050)	FCC/ICES003, EPEAT, CE EMC, LVD or CB, RoHS Green BOM, & RoHS DoC, ErP, REACH SVHC List, & DoC, EEL, WEEE, BSMI,BIS	
Ουτρυτ		PACKAGE CONTENTS	
HDMI:	HDMI 2.0 x1	1. 3m power cord by ship area 2. Remote control with AAA battery 3. 3m touch USB cable 4. Touch pen x 2 (VB-PEN-009) Quick Start Guide + Compliance statement 6. RS232 adapter 7. Clamp x 5 8. Camera Plate 9. Screw x 8 (camera 2+2, wall	
Audio:	x1		
SPDIF:	x1	mount 4) 10. HDMI cable 3m	ew x 8 (camera 2+2, wall
LAN		COMPATIBLE SLOT-IN PC	
RJ45:	x2	VPC35-W53-G1/VPC37-W53-G1	
USB			
Туре А:	USB3.0 x4 (Front x2, Rear x2); USB2.0 x1		
Туре В:	x2 (Rear x1 + Front x1)		
Туре С:	Front*1 (PD65W + DP1.2 + Data USB2.0 + 10M/100M sharing)		
SPEAKERS	3/		
20W x 2			
TOP CAMERA PLATE			
Yes			

Copyright $\ensuremath{\mathbb{C}}$ ViewSonic Corporation 2000-2025. All rights reserved.