Key **Features**

- NFC and SSO sign-in for swift access to the intuitive launcher and personal settings
- Quick-start annotation, sketching, and four-color switching with the stylus
- Octa-core CPU with 8GB RAM and 8GB virtual memory for smooth multitasking
- Four USB-C ports ensure seamless connectivity, supporting up to 100W charging
- Android 14 with integrated ViewSonic Education Software






F A

Product **Description**

Discover the future of interactive learning with the dynamic ViewBoard® IFP53 Series. Enhancing convenience, its SSO and NFC card sign-in functions provide quick access to personalized launchers and cloud storage. With quick-start annotation and the ability to rapidly switch between four colors, you can capture thoughts the moment inspiration strikes. Equipped with Android 14, it features a powerful high-performance octa-core processor complemented by 8GB RAM and 8GB virtual memory, ensuring seamless connectivity and uninterrupted productivity. The integrated ViewSonic Education Software completes the experience, fostering collaboration and engagement in classrooms with interactive digital tools designed to maximize students' potential.

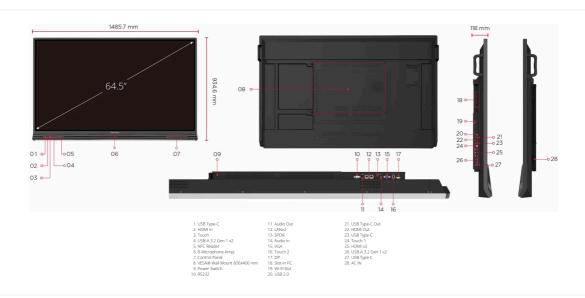

Visit Us

www.viewsonic.com

DISPLAY	
Panel Size:	65"
Panel Type:	TFT LCD Module with DLED Backlight
Display Area (mm):	1428.48(H) x 803.52 (V) (64.5" diagonal)
Aspect Ratio: Resolution:	16:9 UHD 3840x2160(Pixels)
Colors:	1.07B colors
Brightness:	450 nits (typ)
-	5000:1(Typ.)
Contrast Ratio:	5000:1(Min. with DCR enabled)
Response Time:	6.5 ms
Viewing Angles:	H = 178, V = 178 typ.
Backlight Life:	50,000 hrs (typ).
Surface Treatment:	Hardness: 7H. Anti-glare coating
Orientation:	Landscape
PLATFORM	0.1.0.0001/1001/1001/1001
Processor:	Octa-Core CPU (A73*4 + A53*4)
RAM:	8GB (Physical RAM) + 8GB (Virtual RAM) *
Storage:	128GB
TOUCH Type/ Tech:	UFT (Ultra Fine Touch) Technology
Touch Resolution:	32767 x 32767
Touch Point:	Windows: 40 points touch, Android: 20 points touch
INPUT	Timasws. 40 points touch, Android. 20 points touch
	x4 (Frontx1:HDMI2.1 with CEC; Rearx3:(HDMI2.1 with
HDMI:	CEC)x2 & (HDMI2.1 with CEC, ARC)x1
RGB / VGA:	х1
DisplayPort:	x1
Audio:	x1 (PC audio in)
RS232:	x1
OPS:	module slot x 1
OUTPUT	
HDMI:	x1
Audio:	x1 (Earphone out)
SPDIF:	x1
RJ45:	x2
USB	XZ
	USB3.0x4 (Frontx2 ; Rearx2)
Type A:	USB2.0x1 (Rear)
Type B:	USB3.0x3 (Frontx1; Rearx2)
	Input:x3 (Frontx1 with USB3.0, DP1.2, Ethernet 100M, PD
Type C:	100W; Rearx1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W)
	100W; Rearx1 with USB3.0, DP1.2, Ethernet 100M, PD
	100W; Rearx1 with USB3.0, PP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP
SPEAKERS 16W x 2 front soundbar + 20W x 1	100W; Rearx1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP
SPEAKERS 16W x 2 front soundbar + 20W x 1	100W; Rearx1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP
SPEAKERS 16W x 2 front soundbar + 20W x 1 MICROPHONE built-in 8-array microphone	100W; Rearx1 with USB3.0, PP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP
SPEAKERS 16W x 2 front soundbar + 20W x 1 MICROPHONE built-in 8-array microphone	100W; Rearx1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP
SPEAKERS 16W x 2 front soundbar + 20W x 1 MICROPHONE built-in 8-array microphone TOP CAMERA PLATE Yes	100W; Rearx1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP
SPEAKERS 16W x 2 front soundbar + 20W x 1 MICROPHONE built-in 8-array microphone TOP CAMERA PLATE Yes	100W; Rearx1 with USB3.0, PP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP
SPEAKERS 16W x 2 front soundbar + 20W x 1 MICROPHONE built-in 8-array microphone TOP CAMERA PLATE Yes EMBEDDED OS Android 14 BUNDLE SOFTWARE	100W; Rearx1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP
SPEAKERS 16W x 2 front soundbar + 20W x 1 MICROPHONE built-in 8-array microphone TOP CAMERA PLATE Yes EMBEDDED OS Android 14 BUNDLE SOFTWARE Basic Annotation Software:	100W; Rearx1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP subwoofer myViewBoard for Android
SPEAKERS 16W x 2 front soundbar + 20W x 1 MICROPHONE built-in 8-array microphone TOP CAMERA PLATE Yes EMBEDDED OS Android 14 BUNDLE SOFTWARE Basic Annotation Software: Pro Annotation Software:	100W; Rearx1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP subwoofer myViewBoard for Android myViewBoard for Windows (embedded in VPC)
SPEAKERS 16W x 2 front soundbar + 20W x 1 MICROPHONE built-in 8-array microphone TOP CAMERA PLATE Yes EMBEDDED OS Android 14 BUNDLE SOFTWARE Basic Annotation Software: Pro Annotation Software: Wireless Presentation:	100W; Rearx1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP subwoofer myViewBoard for Android myViewBoard for Windows (embedded in VPC) Display, vCast
SPEAKERS 16W x 2 front soundbar + 20W x 1 MICROPHONE built-in 8-array microphone TOP CAMERA PLATE Yes EMBEDDED OS Android 14 BUNDLE SOFTWARE Basic Annotation Software: Pro Annotation Software: Wireless Presentation: Device Management:	100W; Rearx1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP subwoofer myViewBoard for Android myViewBoard for Windows (embedded in VPC) Display, vCast Manager
SPEAKERS 16W x 2 front soundbar + 20W x 1 MICROPHONE built-in 8-array microphone TOP CAMERA PLATE Yes EMBEDDED OS Android 14 BUNDLE SOFTWARE Basic Annotation Software: Pro Annotation Software: Wireless Presentation: Device Management: ViewSonic Launcher:	100W; Rearx1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP subwoofer myViewBoard for Android myViewBoard for Windows (embedded in VPC) Display, vCast
SPEAKERS 16W x 2 front soundbar + 20W x 1 MICROPHONE built-in 8-array microphone TOP CAMERA PLATE Yes EMBEDDED OS Android 14 BUNDLE SOFTWARE Basic Annotation Software: Pro Annotation Software: Wireless Presentation: Device Management: ViewSonic Launcher: SPECIAL FEATURES	100W; Rearx1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP subwoofer myViewBoard for Android myViewBoard for Windows (embedded in VPC) Display, vCast Manager Yes
SPEAKERS 16W x 2 front soundbar + 20W x 1 MICROPHONE built-in 8-array microphone TOP CAMERA PLATE Yes EMBEDDED OS Android 14 BUNDLE SOFTWARE Basic Annotation Software: Pro Annotation Software: Wireless Presentation: Device Management: ViewSonic Launcher: SPECIAL FEATURES All-in-one USB port:	100W; Rearx1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP subwoofer myViewBoard for Android myViewBoard for Windows (embedded in VPC) Display, vCast Manager Yes USB3.0 "SmartPort USB" to all channels.
SPEAKERS 16W x 2 front soundbar + 20W x 1 MICROPHONE built-in 8-array microphone TOP CAMERA PLATE Yes EMBEDDED OS Android 14 BUNDLE SOFTWARE Basic Annotation Software: Pro Annotation Software: Wireless Presentation: Device Management: ViewSonic Launcher: SPECIAL FEATURES	100W; Rearx1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP subwoofer myViewBoard for Android myViewBoard for Windows (embedded in VPC) Display, vCast Manager Yes
SPEAKERS 16W x 2 front soundbar + 20W x 1 MICROPHONE built-in 8-array microphone TOP CAMERA PLATE Yes EMBEDDED OS Android 14 BUNDLE SOFTWARE Basic Annotation Software: Pro Annotation Software: Wireless Presentation: Device Management: ViewSonic Launcher: SPECIAL FEATURES All-in-one USB port: Simple LAN sharing between IFP	100W; Rearx1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP subwoofer myViewBoard for Android myViewBoard for Windows (embedded in VPC) Display, vCast Manager Yes USB3.0 "SmartPort USB" to all channels. 10/100/1000M (USB Type-C 10/100, Android & PC
SPEAKERS 16W x 2 front soundbar + 20W x 1 MICROPHONE built-in 8-array microphone TOP CAMERA PLATE Yes EMBEDDED OS Android 14 BUNDLE SOFTWARE Basic Annotation Software: Pro Annotation Software: Wireless Presentation: Device Management: ViewSonic Launcher: SPECIAL FEATURES All-in-one USB port: Simple LAN sharing between IFP and slot-in device:	100W; Rearx1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP subwoofer myViewBoard for Android myViewBoard for Windows (embedded in VPC) Display, vCast Manager Yes USB3.0 "SmartPort USB" to all channels. 10/100/1000M (USB Type-C 10/100, Android & PC 10/100/1000)
SPEAKERS 16W x 2 front soundbar + 20W x 1 MICROPHONE built-in 8-array microphone TOP CAMERA PLATE Yes EMBEDDED OS Android 14 BUNDLE SOFTWARE Basic Annotation Software: Pro Annotation Software: Wireless Presentation: Device Management: ViewSonic Launcher: SPECIAL FEATURES All-in-one USB port: Simple LAN sharing between IFP and slot-in device: Light Sensor:	100W; Rearx1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP subwoofer myViewBoard for Android myViewBoard for Windows (embedded in VPC) Display, vCast Manager Yes USB3.0 "SmartPort USB" to all channels. 10/100/1000M (USB Type-C 10/100, Android & PC 10/100/1000) Yes
SPEAKERS 16W x 2 front soundbar + 20W x 1 MICROPHONE built-in 8-array microphone TOP CAMERA PLATE Yes EMBEDDED OS Android 14 BUNDLE SOFTWARE Basic Annotation Software: Pro Annotation Software: Wireless Presentation: Device Management: ViewSonic Launcher: SPECIAL FEATURES All-in-one USB port: Simple LAN sharing between IFP and slot-in device: Light Sensor: NFC Reader: Pen Sensor:	100W; Rearx1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP subwoofer myViewBoard for Android myViewBoard for Windows (embedded in VPC) Display, vCast Manager Yes USB3.0 "SmartPort USB" to all channels. 10/100/1000M (USB Type-C 10/100, Android & PC 10/100/1000) Yes Yes
SPEAKERS 16W x 2 front soundbar + 20W x 1 MICROPHONE built-in 8-array microphone TOP CAMERA PLATE Yes EMBEDDED OS Android 14 BUNDLE SOFTWARE Basic Annotation Software: Pro Annotation Software: Wireless Presentation: Device Management: ViewSonic Launcher: SPECIAL FEATURES All-in-one USB port: Simple LAN sharing between IFP and slot-in device: Light Sensor: NFC Reader: Pen Sensor:	100W; Rearx1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP subwoofer myViewBoard for Android myViewBoard for Windows (embedded in VPC) Display, vCast Manager Yes USB3.0 "SmartPort USB" to all channels. 10/100/1000M (USB Type-C 10/100, Android & PC 10/100/1000) Yes Yes
SPEAKERS 16W x 2 front soundbar + 20W x 1 MICROPHONE built-in 8-array microphone TOP CAMERA PLATE Yes EMBEDDED OS Android 14 BUNDLE SOFTWARE Basic Annotation Software: Pro Annotation Software: Wireless Presentation: Device Management: ViewSonic Launcher: SPECIAL FEATURES All-in-one USB port: Simple LAN sharing between IFP and slot-in device: Light Sensor: NFC Reader: Pen Sensor: POWER	100W; Rearx1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP subwoofer myViewBoard for Android myViewBoard for Windows (embedded in VPC) Display, vCast Manager Yes USB3.0 "SmartPort USB" to all channels. 10/100/1000M (USB Type-C 10/100, Android & PC 10/100/1000) Yes Yes
SPEAKERS 16W x 2 front soundbar + 20W x 1 MICROPHONE built-in 8-array microphone TOP CAMERA PLATE Yes EMBEDDED OS Android 14 BUNDLE SOFTWARE Basic Annotation Software: Pro Annotation Software: Wireless Presentation: Device Management: ViewSonic Launcher: SPECIAL FEATURES All-in-one USB port: Simple LAN sharing between IFP and slot-in device: Light Sensor: NFC Reader: Pen Sensor: POWER Voltage:	100W; Rearx1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP myViewBoard for Android myViewBoard for Windows (embedded in VPC) Display, vCast Manager Yes USB3.0 "SmartPort USB" to all channels. 10/100/1000M (USB Type-C 10/100, Android & PC 10/100/1000) Yes Yes Yes Yes
SPEAKERS 16W x 2 front soundbar + 20W x 1 MICROPHONE built-in 8-array microphone TOP CAMERA PLATE Yes EMBEDDED OS Android 14 BUNDLE SOFTWARE Basic Annotation Software: Pro Annotation Software: Wireless Presentation: Device Management: ViewSonic Launcher: SPECIAL FEATURES All-in-one USB port: Simple LAN sharing between IFP and slot-in device: Light Sensor: NFC Reader: Pen Sensor: POWER Voltage: Consumption:	100W; Rearx1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP myViewBoard for Android myViewBoard for Windows (embedded in VPC) Display, vCast Manager Yes USB3.0 "SmartPort USB" to all channels. 10/100/1000M (USB Type-C 10/100, Android & PC 10/100/1000) Yes Yes Yes Yes
SPEAKERS 16W x 2 front soundbar + 20W x 1 MICROPHONE built-in 8-array microphone TOP CAMERA PLATE Yes EMBEDDED OS Android 14 BUNDLE SOFTWARE Basic Annotation Software: Pro Annotation Software: Wireless Presentation: Device Management: ViewSonic Launcher: SPECIAL FEATURES All-in-one USB port: Simple LAN sharing between IFP and slot-in device: Light Sensor: NFC Reader: Pen Sensor: POWER Voltage: Consumption: ERGONOMICS	100W; Rearx1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.0, PD 15W) Output:x1, DP myViewBoard for Android myViewBoard for Windows (embedded in VPC) Display, vCast Manager Yes USB3.0 "SmartPort USB" to all channels. 10/100/1000M (USB Type-C 10/100, Android & PC 10/100/1000) Yes Yes Yes 100-240VAC +/- 10% Wide Range On:85.68W / Off: <0.5W

DIMENSIONS (W X H X D) Physical (inch / mm):

Packaging (inch / mm):	65.35 x 41.14 x 8.66 in / 1660 x 1045 x 220 mm
WEIGHT	
Net (lb / kg):	85.98 lb / 39 kg

58.49 x 36.8 x 4.65 in / 1485.7 x 934.6 x 118 mm

Gross (lb / kg): 107.47 lb / 48.75 kg

REGULATIONS

DOE EPEAT, DOE Energy Star, CE EMC, LVD or CB, RoHS Green BOM & RoHS DoC, ErP (2009/125/EC), REACH SVHC List & DoC, EEL, , WEEE, BSMI, Green Mark

PACKAGE CONTENTS

- 1. 3m power cord by ship area
- 2. Type C cable 1.8m(USB-IF certified)
- 3. Remote control with AAA battery
- (new VS remote control)
- 4. 3m touch USB cable(USB 2.0)
- 5. Touch pen x 2 (VB-PEN-002)
- 6. Quick Start Guide
- 7. RS232 adapter
- 8. Clamp x 5
- 9. Camera Plate
- 10. Screw x 8 (camera 2+2, wall mount 4)
- 11. HDMI cable 3m(HDMI LA certified)
- 12. AAA Battery x 2
- 13. Compliance statement

COMPATIBLE SLOT-IN PC

VPCF5-W33-G1 VPC37-W53-G1 VPC35-W53-G1 VPC-A31-O1

NOTE

*Disclaimer for Virtual RAM Usage:
This device's Virtual RAM uses part of the internal storage to potentially enhance performance. It's not a substitute for physical RAM and might impact storage availability and device longevity. Users should assess their needs before enabling this feature. Note that performance outcomes can vary based on application use and device conditions. The manufacturer may modify or discontinue this feature at any time without notice.

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.