



VIEWBOARD

# ViewBoard IFP65G1


## Key Features

- Bring Your Own OS interactive flat panel for versatile use in any scenario
- Seamless USB-C plug-and-play connectivity for convenient presentations
- 65W charging of peripheral devices, ensuring uninterrupted presentations
- Flexible integration with slot-in PCs, supporting Windows, Linux, and Android OS



## Product Description

Elevate collaboration and productivity with the ViewBoard IFP65G1 Series. Engineered without a native OS, it effortlessly connects with laptops, desktops, and mobile devices through its USB-C port, ensuring smooth and effortless large-screen presentations. Going beyond, it adapts to a range of technological preferences by fully integrating with slot-in PCs, enabling flexible workflows across Android, Windows, and Linux operating systems. Whether your organization utilizes the Google Workspace suite or prefers Microsoft 365, its adaptability shines in any scenario, in any environment.

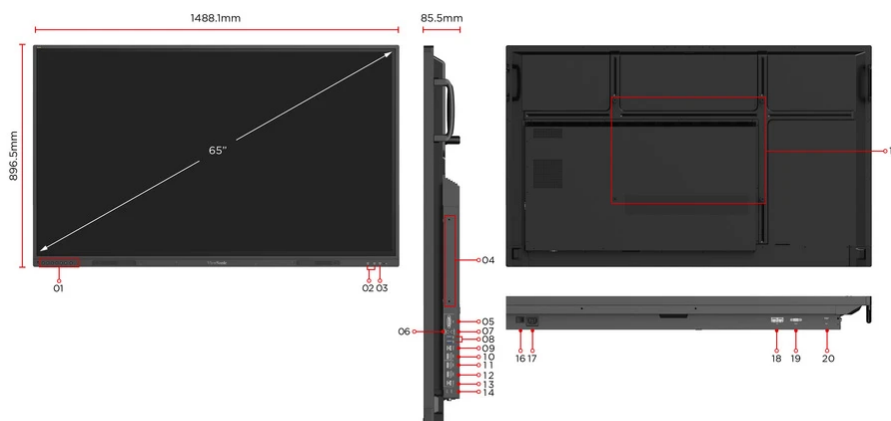

1. Menu Controls  
2. USB 3.0 X 2  
3. USB 2.0  
4. OPS Slot  
5. VGA

8. USB 3.0 X 2  
9. Touch 1  
10. HDMI 1  
11. HDMI 2  
12. HDMI 3

15. VESA® Wall Mount 600 x 400mm  
16. Power On/OFF  
17. AC IN  
18. RS232  
19. USB 2.0(FW update)

6. Audio In  
7. Audio Out

13. Touch 2  
14. USB Type-C

---

**Visit Us**

[www.viewsonic.com](http://www.viewsonic.com)



**DISPLAY**

Panel Size:	65"
Panel Type:	TFT LCD Module with DLED Backlight.
Display Area (mm):	1428.48 (H) x 803.52 (V)
Aspect Ratio:	16:9
Resolution:	UHD 3840x2160
Colors:	1.07B colors (8bit+FRC)
Brightness:	450nits
Contrast Ratio:	5000:1 (typ.) 6000:1 (DCR)
Response Time:	8ms
Viewing Angles:	H = 178, V = 178 typ.
Backlight Life:	50,000 hours (Typ)
Surface Treatment:	Hardness: 9H, Anti-glare coating
Bezel:	Slim
Orientation:	Landscape

**TOUCH**

Type/ Tech:	Ultra Fine Touch Technology (IR Recognition)
Touch Resolution:	32767 × 32767
Touch Point:	Windows: 40 points of touch, Android : 20 points of touch

**INPUT**

HDMI:	Rear 2.0 x 3 (HDMI 1 & 3 Support CEC; HDMI 2 Supports CEC & ARC)
RGB / VGA:	x1
Audio:	x1
RS232:	x1
OPS:	x1

**OUTPUT**

Audio:	x1
--------	----

**LAN**

RJ45:	1 in 1 out
-------	------------

**USB**

Type A:	Front x3(USB2.0x1, USB3.0x2) Rear x3(USB3.0x2, 2.0 x1 for FW update)
Type B:	Rear x2 (USB 3.0x2)
Type C:	x1 ( DP 1.2, Touch, Data Sharing, PD65W, Ethernet 10M/100M)

**SPEAKERS**

15Wx2
-------

**TOP CAMERA PLATE**

Yes
-----

**COMPATIBILITY**

HDMI:	3840x2160 @ 60Hz
-------	------------------

**SPECIAL FEATURES**

All-in-one USB port:	"SmartPort™ USB" to all channels.
----------------------	-----------------------------------

**POWER**

Voltage:	100-240VAC +/- 10% Wide Range
Consumption:	On: 103.8W, Off mode <0.5W

**ERGONOMICS**

Wall Mount (VESA®):	600mm x 400 mm
---------------------	----------------

**OPERATING CONDITIONS**

Temperature (° C):	0°C to 40°C
Humidity:	20% ~ 80% RH non-condensing

**DIMENSIONS (W X H X D)**

Physical (inch / mm):	58.6 x 35.3 x 3.4 in / 1488 x 896.5 x 85.5 mm
Packaging (inch / mm):	64.1 x 39.6 x 8.2 in / 1628 x 1005 x 208 mm

**WEIGHT**

Net (lb / kg):	81.46lb/36.95kg
Gross (lb / kg):	107.9163lb/48.95kg

**REGULATIONS**

US NRTL w/ CA,FCC/ICES003, DOE Energy Star,DOE EPEAT, CE EMC, LVD or CB, RoHS Green BOM & RoHS DoC, ErP, REACH SVHC List & DoC, EEL, WEEE, GOST-R / EAC, FF,LBL, ErP-Eco,SCIP,Annex I,Annex II,TPCH DoC,Packing waste,CA65 DoC

**PACKAGE CONTENTS**

1. 3m power cable
2. HDMI 2.0 cable 3m x 1 (HDMI LA certified)
3. Remote control with AAA battery (Opt.)
4. 3m USB 2.0 touch cable x 1
5. Touch pen (Passive pen) x 2 (VB-PEN-002)
6. Quick Start Guide + Compliance Statement
7. RS232 adapter
8. Screw (wall mount 4)
9. Camera Plate

**COMPATIBLE SLOT-IN PC**

VPC-A31-O1/VPC35-W53-G1/VPC37-W53-G1
--------------------------------------

**NOTE**

The VPC also can work with other VPC models

Simple LAN sharing between IFP and slot-in device:	10/100/1000M (USB Type-C 10M/100M, OPS 1000M)
--	---

Light Sensor:	Yes
---------------	-----

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.

