




SATA III M.2 SSDs M.2 SSD 825S

Transcend's SATA III 6Gb/s M.2 SSD 825S comes with a small form factor and high-quality 3D NAND flash, upgrading your Ultrabooks and laptops in a snap. The SSD is designed with multiple firmware optimization technologies like SLC caching and LDPC ECC mechanism, which enhance the storage reliability and prolong the drive lifespan. A great difference can be made with a small upgrade.

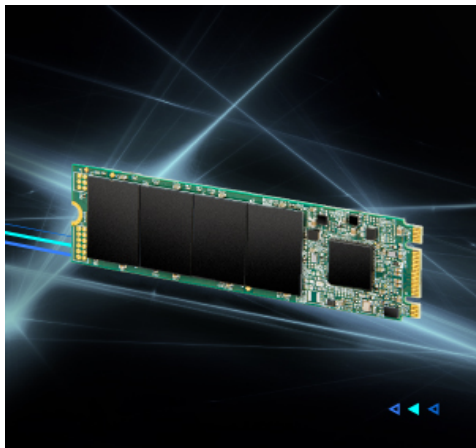


Unparalleled performance

Featuring the M.2 standard (80mm), the mainstream SATA III 6Gb/s interface and a powerful controller, Transcend's M.2 SSD 825S reaches incredible read and write speeds of up to 550MB/s and 500MB/s, providing 1.5 times faster boot time than conventional hard drives.



Designed for slim devices

The height of the M.2 SSD 825S is only 80mm, ideal for Ultrabooks and lightweight notebooks. Thinner and lighter than normal hard drives, the M.2 SSD 825S gives your computer a much needed boost while saving space!

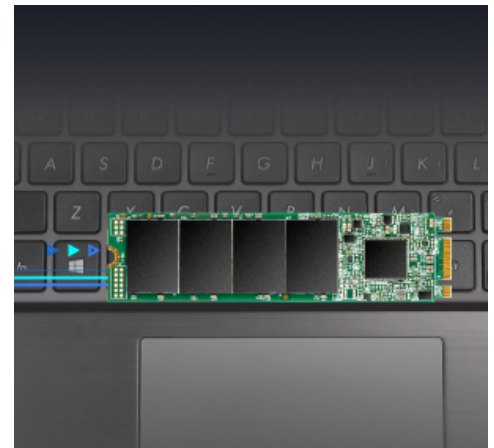

Respond fast

Dedicated to maximizing high-performance computing, the M.2 SSD 825S features 4k random file read and write speeds of up to 80,000 IOPS. It delivers incredibly short loading times and almost instant response for heavy graphics and multimedia applications.



SATA III M.2 SSDs M.2 SSD 825S

Features

- Built-in SLC caching technology for exceptional transfer speeds
- Engineered with a RAID engine and LDPC (Low-Density Parity Check) coding to ensure data integrity
- Space-saving M.2 Type 2280 form factor



SSD Scope

SSD Scope features useful functions to maintain your SSD in a healthy status and also copy data from your original HDD to Transcend's new SSD.

Specifications

Appearance

| | |
|------------|---|
| Dimensions | 80.0 mm x 22.0 mm x 3.58 mm (3.15" x 0.87" x 0.14") |
| Weight | 9 g (0.32 oz) |
| Type | M.2 2280 |

Interface

| | |
|---------------|----------------|
| Bus Interface | SATA III 6Gb/s |
|---------------|----------------|

Storage

| | |
|------------|------------------------------|
| Flash Type | 3D NAND flash |
| Capacity | 250GB / 500 GB / 1 TB / 2 TB |

Operating Environment

| | |
|-----------------------|---------------------------|
| Operating Temperature | 0°C (32°F) ~ 70°C (158°F) |
| Operating Voltage | 3.3V±5% |

Performance

| | |
|-----------------------------------|--|
| Read Speed (Max.) | up to 550 MB/s |
| Write Speed (Max.) | up to 500 MB/s |
| 4K Random Read/Write (IOMeter) | Read: up to 55,000 IOPS Write: up to 80,000 IOPS |
| Mean Time Between Failures (MTBF) | 2,000,000 hour(s) |
| Drive Writes Per Day (DWPD) | 0.3 (3 yrs) |
| Terabytes Written (TBW) | up to 720 TBW |
| Note | Speed may vary due to host hardware, software, usage, and storage capacity. The workload used to rate DWPD may be different from your actual workload, which may vary due to host hardware, software, usage, and storage capacity. Terabytes Written (TBW) expresses the endurance under the highest capacity. |

Warranty

| | |
|-------------|-----------------------------------|
| Certificate | CE / UKCA / FCC / BSMI / KC / RCM |
| Warranty | Three-year Limited Warranty |

Ordering Information

| | |
|-------|---------------|
| 250GB | TS250GMTS825S |
| 500GB | TS500GMTS825S |
| 1TB | TS1TMTS825S |
| 2TB | TS2TMTS825S |