



LCD DISPLAY

VG2709-2K-MHD-2


Key Features

- SuperClear® IPS panel with QHD 2560 X 1440 resolution
- 100Hz Variable Refresh Rate delivers fluid visuals
- HDMI and DisplayPort inputs for simple connectivity
- Super narrow bezel with dual 2.5W speakers
- Ergonomic tilt, swivel, pivot and height adjustment capabilities



Product Description

The ViewSonic VG2709-2K-MHD-2 is a 27" QHD monitor featuring HDMI and Display Port inputs for business and home use. The variable refresh rate, eye-care technology, and various ViewMode presets cater for optimal screen performance and comfortable viewing without tearing or stuttering. Expand your workspace and experience truly seamless, ergonomic multitasking on just one screen with a VESA-compatible mount at low energy consumption.

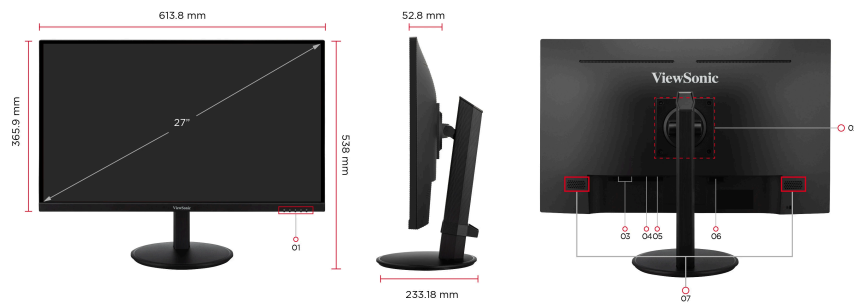

1. Menu Control Panel
2. VESA Compatible(Wall Mount 75 x 75 mm)
3. HDMI*2
4. Display Port
5. Audio Out
6. AC in
7. Speaker

Visit Us

www.viewsonic.com



DISPLAY

Display Size (in.):	27
Viewable Area (in.):	27
Panel Type:	IPS Technology
Resolution:	2560 x 1440
Resolution Type:	QHD (Quad HD)
Static Contrast Ratio:	1,000:1 (typ)
Dynamic Contrast Ratio:	1.4
High Dynamic Range:	50M:1
Light Source:	LED
Brightness:	350 cd/m ² (typ)
Colors:	16.7M
Color Space Support:	8 bit true
Aspect Ratio:	16:9
Response Time (Typical GTG):	4ms
Response Time (GTG w/OD):	4ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	100
Variable Refresh Rate Technology:	Yes
Low Blue Light:	Software solution
Flicker-Free:	Yes
Color Gamut:	NTSC: 83% size (Typ) sRGB: 117% size / 99% coverage (Typ)
Pixel Size:	0.233 mm (H) x 0.233 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

COMPATIBILITY

PC Resolution (max):	2560x1440
Mac® Resolution (max):	2560x1440
PC Operating System:	Windows 10/11 certified; macOS tested
Mac® Resolution (min):	2560x1440

CONNECTOR

3.5mm Audio Out:	1
HDMI 2.0:	2
DisplayPort:	1
Power in:	3-pin Socket (IEC C14 / CEE22)

AUDIO

Internal Speakers:	2.5Watts x2
--------------------	-------------

POWER

Eco Mode (Conserve):	18W
Eco Mode (optimized):	22W
Consumption (typical):	23W
Consumption (max):	30W
Voltage:	AC 100-240V
Stand-by:	0.5W
Power Supply:	Internal Power Supply

CONTROLS

Physical Controls:	Key 1 (favorite), Key 2, Key 3, Key 4, Key 5 (power)
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT

VESA Compatible:	100 x 100 mm
------------------	--------------

INPUT SIGNAL

Frequency Horizontal:	30 ~ 150KHz
Frequency Vertical:	48 ~ 100Hz

VIDEO INPUT

Digital Sync:	TMDS - HDMI (v2.0), PCI-E - DisplayPort (v1.4)
---------------	--

ERGONOMICS

Height Adjust (mm):	130
Swivel:	360°
Tilt (Forward/Back):	-3.5° / 28°
Pivot (Right/Left):	90° / 90°

WEIGHT (IMPERIAL)

Net (lbs):	14.8
Net Without Stand (lbs):	10.1
Gross (lbs):	17.9

WEIGHT (METRIC)

Net (kg):	6.7
Net Without Stand (kg):	4.6
Gross (kg):	8.1

DIMENSIONS (IMPERIAL) (WXHXD)

Packaging (in.):	30.5 x 18.3 x 5.5
Physical (in.):	24.17 x 16.06~21.18 x 9.18
Physical Without Stand (in.):	24.17 x 14.4 x 2.08

DIMENSIONS (METRIC) (WXHXD)

Packaging (mm):	775 x 465 x 140
Physical (mm):	613.8 x 408~538 x 233.18
Physical Without Stand (mm):	613.8 x 365.87 x 52.8

GENERAL

Regulations:	Energy Star, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, TCO 9.0, EAC, UkrSEPRO
--------------	---

PACKAGE CONTENTS:	VG2709-2K-MHD-2 x1, 3-pin Plug (IEC C13 / CEE22) x1, HDMI Cable (v2.0; Male-Male) x1, Quick Start Guide x1
-------------------	--

Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
-------------------	--

Warranty:	*Warranty offered may differ from market to
-----------	---



ADDITIONAL HARDWARE

Kensington Lock Slot: 1

Power Management: Energy Star standards

Cable Organization: Yes

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.

