

# ViewSonic® LCD DISPLAY

## VG2709-2K-MHD


### Key Features

- SuperClear® IPS panel with QHD 2560 X 1440 resolution
- HDMI and Display Port inputs for simple connectivity
- Super narrow bezel with dual 2.5W speakers
- Ergonomic tilt, swivel, pivot and height adjustment capabilities
- 75Hz Refresh rate delivers fluid visuals



### Product Description

The ViewSonic VG2709-2K-MHD is a 27" QHD monitor featuring HDMI and Display Port inputs for business and home use. The variable refresh rate, eye-care technology, and various ViewMode presets cater for optimal screen performance and comfortable viewing without tearing or stuttering. Expand your workspace and experience truly seamless, ergonomic multitasking on just one screen with a VESA-compatible mount at low energy consumption.

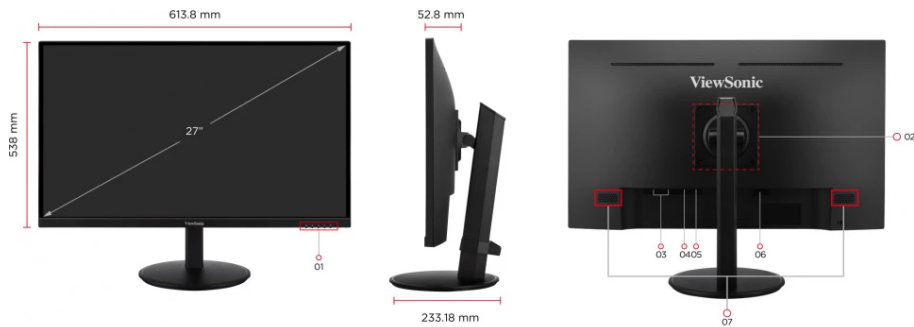

1. Menu Control Panel
2. VESA Compatible(Wall Mount 100 x 100mm)
3. HDMI\*2
4. DisplayPort
5. Audio Out
6. AC In
7. Speaker

Visit Us

[www.viewsonic.com](http://www.viewsonic.com)



**DISPLAY**

Display Size (in.):	27
Viewable Area (in.):	27
Panel Type:	IPS Technology
Resolution:	2560 x 1440
Resolution Type:	QHD (Quad HD)
Static Contrast Ratio:	1,000:1 (typ)
Dynamic Contrast Ratio:	50M:1
Light Source:	LED
Brightness:	250 cd/m <sup>2</sup> (typ)
__Brightness (PCS):	250 cd/m <sup>2</sup> (typ)
Colors:	16.7M
Color Space Support:	8 bit true
Aspect Ratio:	16:9
Response Time (Typical GTG):	5ms
Response Time (GTG w/OD):	5ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	75
Variable Refresh Rate Technology:	Yes
Blue Light Filter:	Yes
Flicker-Free:	Yes
Color Gamut:	NTSC: 72% size (Typ) sRGB: 104% size (Typ)
Pixel Size:	0.233 mm (H) x 0.233 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

**COMPATIBILITY**

PC Resolution (max):	2560x1440
Mac® Resolution (max):	2560x1440
PC Operating System:	Windows 10/11 certified; macOS tested
Mac® Resolution (min):	2560x1440

**CONNECTOR**

3.5mm Audio Out:	1
HDMI 1.4:	2
DisplayPort:	1
Power in:	3-pin Socket (IEC C14 / CEE22)

**AUDIO**

Internal Speakers:	2.5Watts x2
--------------------	-------------

**POWER**

Eco Mode (Conserve):	22W
Eco Mode (optimized):	26W
Consumption (typical):	28W
Consumption (max):	30W
Voltage:	AC 100-240V
Stand-by:	0.5W
Power Supply:	Internal Power Supply

**ADDITIONAL HARDWARE**

Kensington Lock Slot:	1
Cable Organization:	Yes

**CONTROLS**

Physical Controls:	Key 1 (favorite), Key 2, Key 3, Key 4, Key 5 (power)
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

**OPERATING CONDITIONS**

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

**WALL MOUNT**

VESA Compatible:	100 x 100 mm
------------------	--------------

**INPUT SIGNAL**

Frequency Horizontal:	31 ~ 115KHz
Frequency Vertical:	48 ~ 75Hz

**VIDEO INPUT**

Digital Sync:	TMDS - HDMI (v1.4), PCI-E - DisplayPort (v1.4)
---------------	--

**ERGONOMICS**

Height Adjust (mm):	130
Swivel:	360°
Tilt (Forward/Back):	-3.5° / 28°
Pivot (Right/Left):	90° / 90°

**WEIGHT (IMPERIAL)**

Net (lbs):	14.8
Net Without Stand (lbs):	10.1
Gross (lbs):	19

**WEIGHT (METRIC)**

Net (kg):	6.7
Net Without Stand (kg):	4.6
Gross (kg):	8.6

**DIMENSIONS (IMPERIAL) (WXHXD)**

Packaging (in.):	30.5 x 18.3 x 5.5
Physical (in.):	24.2 x 16.06~21.18 x 9.2
Physical Without Stand (in.):	24.2 x 14.4 x 2.1

**DIMENSIONS (METRIC) (WXHXD)**

Packaging (mm):	775 x 465 x 140
Physical (mm):	614 x 408~538 x 233
Physical Without Stand (mm):	614 x 366 x 53

**GENERAL**

Regulations:	Energy Star, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, UKCA
PACKAGE CONTENTS:	VG2709-2K-MHD x1, 3-pin Plug (IEC C13 / CEE22) x1, HDMI Cable (v1.4; Male-Male) x1, Quick Start Guide x1
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to market
Power Management:	Energy Star standards