



Mosaic™ Socket outlets - German standard


Cat. No(s): 0 772 11/12/13/14/16/17/18/19/20/45
 0 787 02 - 0 792 13 - 0 793 55L
 2 780 14L - 2 782 11L/18L



0 787 02



0 772 12



0 793 55L

1. USE

Multi-support single socket outlets with shutters, German standard. The mechanism can be flush-mounted or surface-mounted. To be fitted with finishing plates.

Antimicrobial* sockets:

These products are made of silver-ion based antimicrobial* material. This technology eliminates bacteria, fungi and viruses without creating any immunisation or resistance effects (physical, rather than chemical, destruction).

Particularly suitable for healthcare establishments (hospitals, clinics, nursing homes, laboratories, waiting rooms, etc.) and more generally for areas subject to hygiene restrictions (industrial, shared and restaurant kitchens, waste, etc.).

These products offer an additional way of ensuring the non-proliferation of bacteria, fungi and viruses without interfering with cleaning protocols.


2. RANGE

	Description	Cat. Nos
	2 P+E socket White - 2 modules	0 772 11 2 782 11L
	2 P+E socket with indicator White antimicrobial* - 2 modules	0 772 12
	2 P+E socket Green antimicrobial* - 2 modules	0 772 16
	2 P+E socket Orange antimicrobial* - 2 modules	0 772 17
	2 P+E socket Red - 2 modules	0 772 18 2 782 18L
	2 P+E socket Flap cover plate White antimicrobial* - 2 modules	0 772 19
	2 P+E socket special 4 mm² and tapping White - 2 modules	0 772 13
	2 P+E socket special 4 mm² and tapping Aluminium - 2 modules	0 792 13
	2 P+E socket tamperproof Red - 2 modules	0 772 14 2 780 14L

2. RANGE (continued)

	Description	Cat. Nos
	2 P+E socket Red antimicrobial* - 2 modules	0 772 20
	2 P+E socket White antimicrobial* - 2 modules	0 787 02
	2 P+E socket, 45° inclined White - 2 modules	0 772 45
	2 P+E socket, 45° inclined Mat Black - 2 modules	0 793 55L

3. DIMENSIONS (mm)

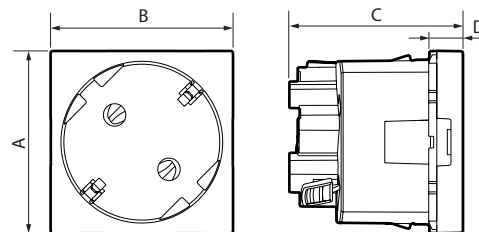

Cat. Nos	A	B	C	D
0 772 20 - 0 787 02 0 772 13 - 0 792 13	45	45	39.5	8.5
0 772 11/12/16/17/18/19/45 0 793 55L - 2 782 11L/18L	45	45	43	8.5
0 772 14 - 2 780 14L	45	45	40	8.5

4. CONNECTION

• Cat. Nos 0 772 11/12/16/17/18/19/45 - 0 793 55L - 2 782 11L/18L:

Automatic terminals

Terminal capacity: 2 x 2.5 mm²
Stripping length: 12 mm

• Cat. Nos 0 772 13/14/20 - 0 787 02 - 0 792 13 - 2 780 14L:

Screw terminals

Terminal capacity: 2 x 4 mm²
Stripping length: 10 mm
Screwdriver: flat 4 mm - PZ2

5. TECHNICAL CHARACTERISTICS

■ **5.1 Mechanical characteristics**

Impact resistance: IK 04
Penetration against solid bodies and liquids: IP 20

■ **5.2 Material characteristics**

Base: PC
Cover plate:
White RAL 9003 PC
Red, Green, Orange PC
PC + antimicrobial* treatment for antimicrobial* socket outlets.
Painted Mat Black PC RAL 9017 for Cat. No. 0 793 55L
Painted Aluminium PC varnished glittery for Cat. No. 0 792 13

Halogen-free
UV-resistant

Self-extinguishing:
850°C/30 s for insulating components
650°C/30 s for the other insulating part

■ **5.3 Electrical characteristics**

Voltage: 250 V~
Current: 16 A

■ **5.4 Climate characteristics**

Storage temperature: -10°C to +70°C
Usage temperature: -5°C to +35°C

6. CLEANING

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

■ **6.1 Resistance to cleaning products**

Resistant to the following products: hexane (NF C 61-314), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

■ **6.2 Resistance to hospital grade cleaning products**

Resistant to the following products: Anios, Surfanios, Bactilysine, diluted hydrogen peroxide (35%).

Caution: Always test before using other special cleaning products.

7. ACCESSORIES

0 676 64	Bulb for socket (0 772 12) with indicator White wired bulbs (wire length = 100 mm) (230 V - 2.4 mA)
0 502 99	Tamperproof

8. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.
See e-catalogue.

* Contains silver ions that limit the development of bacteria on the surface.