

Overview


HPE Gen10 Plus Ethernet Adapters

HPE ProLiant DL, ML and Apollo

Driven by hybrid cloud services, mobile data and streaming video applications, IT professionals are constantly challenged to deliver secure and reliable network bandwidth that cost-effectively scales to demands of the networking traffic. For any given workload, the right mix of performance, efficiency, reliability and security are paramount.

HPE has your data center infrastructure covered with the latest networking adapters, switches, transceivers and cables for a complete end-to-end solution to support your various workload needs.

With Gen10 Plus ProLiant Servers, HPE is offering the industry's most secure server platform. Through its Root of Trust server design down to the Network Interface Card (NIC), these security features are built-in so you can deploy with confidence. HPE Gen10 Plus servers will help prevent, detect and recover from cyberattacks such as denial of service and malware-infected firmware. Protecting applications, data and infrastructure from security breaches through storage and networking security technologies is first priority for HPE Gen10 Plus Servers.

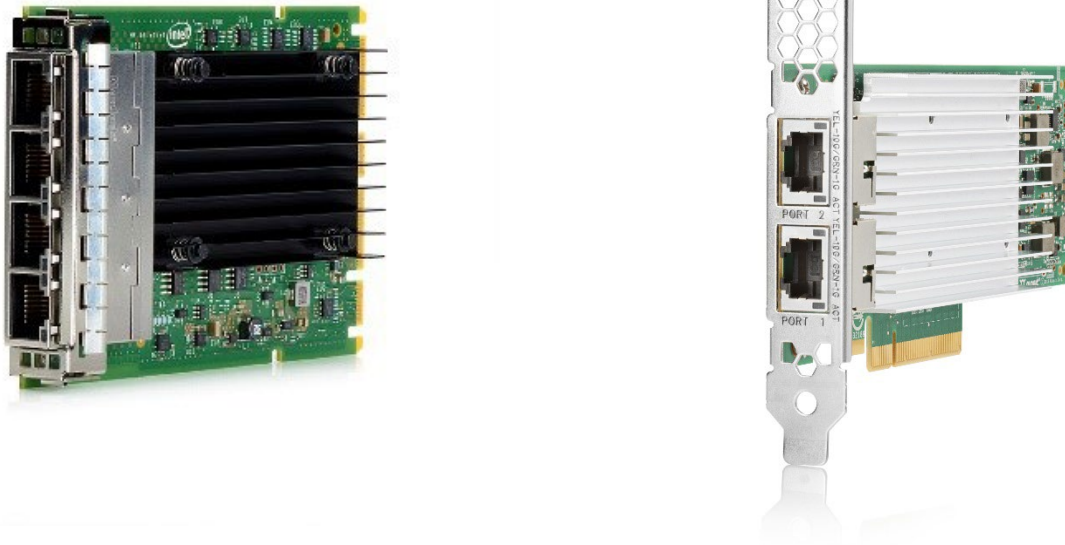

HPE Gen10 Plus Ethernet Adapters

Overview

Models

| | |
|--|------------|
| Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T Adapter for HPE | P51178-B21 |
| Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE | P51181-B21 |
| Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE | P26253-B21 |
| Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE | P10097-B21 |
| Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ Adapter for HPE | P26259-B21 |
| Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE | P26256-B21 |
| Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE | P26262-B21 |
| Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE | P10115-B21 |
| Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE | P26264-B21 |
| Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 OCP3 Adapter for HPE | P26269-B21 |
| Intel I350-T4 Ethernet 1Gb 4-port BASE-T Adapter for HPE | P21106-B21 |
| Intel I350-T4 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE | P08449-B21 |
| Intel X710-DA2 Ethernet 10Gb 2-port SFP+ Adapter for HPE | P28787-B21 |
| Intel X710-DA2 Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE | P28778-B21 |
| Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE | P08443-B21 |
| Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE | P10106-B21 |
| Intel E810-XXVDA4 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE | P08458-B21 |
| Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 Adapter for HPE | P21112-B21 |
| Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 OCP3 Adapter for HPE | P22767-B21 |
| Intel E810-XXVDA4 Ethernet 10/25Gb 4-port SFP28 OCP3 Adapter for HPE | P41614-B21 |
| Intel E810-2CQDA2 Ethernet 100Gb 2-port QSFP28 Adapter for HPE | P41611-B21 |
| Marvell QL41132HLRJ Ethernet 10Gb 2-port BASE-T Adapter for HPE | P08437-B21 |
| Marvell QL41132HQRJ Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE | P10103-B21 |
| Marvell QL41132HLCU Ethernet 10Gb 2-port SFP+ Adapter for HPE | P21933-B21 |
| Marvell QL41132HQCU Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE | P08452-B21 |
| Marvell QL41134HLCU Ethernet 10Gb 4-port SFP+ Adapter for HPE | P10094-B21 |
| Marvell QL41232HLCU Ethernet 10/25Gb 2-port SFP28 Adapter for HPE | P22702-B21 |
| Marvell QL41232HQCU Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE | P10118-B21 |
| Mellanox MCX512F-ACHT Ethernet 10/25Gb 2-port SFP28 Adapter for HPE | P13188-B21 |
| Mellanox MCX562A-ACAI Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE | P10112-B21 |
| HPE Ethernet 100Gb 2-port QSFP28 MCX516A-CCHT Adapter | P21927-B21 |
| Mellanox MCX623106AS-CDAT Ethernet 100Gb 2-port QSFP56 Adapter for HPE | P25960-B21 |
| Mellanox MCX623105AS-VDAT Ethernet 200Gb 1-port QSFP56 Adapter for HPE | P10180-B21 |
| Mellanox MCX631102AS-ADAT Ethernet 10/25Gb 2-port SFP28 Adapter for HPE | P42044-B21 |
| Mellanox MCX631432AS-ADAI Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE | P42041-B21 |
| Xilinx X2522-25G-PLUS Ethernet 10/25Gb 2-port SFP28 Adapter for HPE | P21109-B21 |

Notes: Please go to [Technical Specifications Section](#) to visit the hyperlinks.



Standard Features

Table 1

| | | |
|--|---|--|
| SKU | P51178-B21 | P51181-B21 |
| Description | Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T Adapter for HPE | Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE |
| Card Type/Profile | Stand up | OCP 3.0 |
| ASIC/Chip | Broadcom BCM5719 | Broadcom BCM5719 |
| PCIe Version | PCIe 2.0 x4 | PCIe 2.0 x4 |
| Power Requirement | 5.78W | 4.69W |
| UEFI PXE Boot | √ | √ |
| Legacy BIOS PXE Boot | √ | √ |
| Wake-on-LAN (WOL) | No | √ |
| Internet Protocol (IP) IPv4, IPv6 | √ | √ |
| Auto Negotiation | 1GbE/100Mb/1Mb | 1GbE/100Mb/1Mb |
| iSCSI Remote Boot | UEFI | UEFI |
| Tunnel Offload | No | No |
| RDMA¹ | No | No |
| Receive Side Scaling (RSS) | √ | √ |
| VMware NetQueue and Microsoft Virtual Machine Queue (VMQ) | No | No |
| NPAR | No | No |
| Single Root I/O Virtualization (SR-IOV) | No | No |
| Data Plane Development Kit (DPDK) | No | No |
| Root of Trust | Limited root of trust | Limited root of trust |
| Authenticated Updates | Software | Software |
| Secure Boot | No | No |
| Audit Log | No | No |
| Sanitization | No | No |

Notes: ¹HPE recommends using identical network adapters on both ends of the RoCE connection to avoid interoperability issue.



Standard Features

| SKU | P26256-B21 | P26259-B21 | P10097-B21 | P26253-B21 |
|--|--|---|--|---|
| Description | Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE | Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ Adapter for HPE | Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE | Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE |
| Card Type/Profile | OCP 3.0 | Stand up | OCP 3.0 | Stand up |
| ASIC/Chip | Broadcom BCM57412 | Broadcom BCM57412 | Broadcom BCM57416 | Broadcom BCM57416 |
| PCIe Version | PCIe 3.0 x8 | PCIe 3.0 x16 | PCIe 3.0 x8 | PCIe 3.0 x8 |
| Power Requirement | Typical: 11.6 W | Typical: 7.9 W Max: 9.1 W | Typical: 14.6 W Max: 16.1 W | Typical: 16.4 W Max: 16.1 W |
| UEFI PXE Boot | √ | √ | √ | √ |
| Legacy BIOS PXE Boot | √ | √ | √ | √ |
| Wake-on-LAN (WOL) | √ | | | |
| Internet Protocol (IP) IPv4, IPv6 | √ | √ | √ | √ |
| Auto Negotiation | 1Gb, 10Gb | 1Gb, 10Gb | 1Gb, 10Gb | 1Gb, 10Gb |
| iSCSI Remote Boot | UEFI | UEFI | UEFI | UEFI |
| Tunnel Offload | VXLAN, NVGRE, GENEVE | VXLAN, NVGRE, GENEVE | VXLAN, NVGRE, GENEVE | VXLAN, NVGRE, GENEVE |
| RDMA¹ | RoCEv1, RoCEv2 | RoCEv1, RoCEv2 | RoCEv1, RoCEv2 | RoCEv1, RoCEv2 |
| Receive Side Scaling (RSS) | √ | √ | √ | √ |
| VMware NetQueue and Microsoft Virtual Machine Queue (VMQ) | √ | √ | √ | √ |
| NPAR | 8PFs or 16PFs | 8PFs or 16PFs | 8PFs or 16PFs | 8PFs or 16PFs |
| Single Root I/O Virtualization (SR-IOV) | 128VF(total per chip) | 128VF(total per chip) | 128VF(total per chip) | 128VF(total per chip) |
| Data Plane Development Kit (DPDK) | √ | √ | √ | √ |
| Root of Trust | Hardware | Hardware | Hardware | Hardware |
| Authenticated Updates | √ | √ | √ | √ |
| Secure Boot | √ | √ | √ | √ |
| Audit Log | √ | √ | √ | √ |
| Sanitization | √ | √ | √ | √ |
| Notes: ¹ HPE recommends using identical network adapters on both ends of the RoCE connection to avoid interoperability issue | | | | |



Standard Features

Table 3

| SKU | P10115-B21 | P26262-B21 | P26269-B21 | P26264-B21 |
|--|--|---|--|---|
| Description | Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE | Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE | Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 OCP3 Adapter for HPE | Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE |
| Card Type/Profile | OCP 3.0 | Stand up | OCP 3.0 | Stand up |
| ASIC/Chip | Broadcom BCM57414 | Broadcom BCM57414 | Broadcom BCM57504 | Broadcom BCM57504 |
| PCIe Version | PCIe 3.0 x8 | PCIe 3.0 x8 | PCIe 4.0 x16 | PCIe 4.0 x16 |
| Power Requirement | Typical: 11.6 W | Typical: 9.1 W Max: 9.9 W | Typical 16.0W Max 16.9W | Typical 15.2W Max 16.7W |
| UEFI PXE Boot | √ | √ | √ | √ |
| Legacy BIOS PXE Boot | √ | √ | √ | √ |
| Wake-on-LAN (WOL) | √ | | √ | |
| Internet Protocol (IP) IPv4, IPv6 | √ | √ | √ | √ |
| Auto Negotiation | 1Gb, 10Gb, 25Gb | 1Gb, 10Gb, 25Gb, | 10Gb, 25Gb | 10Gb, 25Gb |
| iSCSI Remote Boot | UEFI | UEFI | UEFI | UEFI |
| Tunnel Offload | VXLAN, NVGRE, GENEVE | VXLAN, NVGRE, GENEVE | VXLAN, NVGRE, GENEVE | VXLAN, NVGRE, GENEVE |
| RDMA¹ | RoCEv1, RoCEv2 | RoCEv1, RoCEv2 | RoCEv2 | RoCEv2 |
| Receive Side Scaling (RSS) | √ | √ | √ | √ |
| VMware NetQueue and Microsoft Virtual Machine Queue (VMQ) | √ | √ | √ | √ |
| NPAR | 8PFs or 16PFs | 8PFs or 16PFs | 8PFs or 16PFs | 8PFs or 16PFs |
| Single Root I/O Virtualization (SR-IOV) | 128VF(total per chip) | 128VF(total per chip) | 1K VF (total per chip) | 1K VF (total per chip) |
| Data Plane Development Kit (DPDK) | √ | √ | √ | √ |
| Root of Trust | Hardware | Hardware | Hardware | Hardware |
| Authenticated Updates | √ | √ | √ | √ |
| Secure Boot | √ | √ | √ | √ |
| Audit Log | √ | √ | √ | √ |
| Sanitization | √ | √ | √ | √ |

Notes:

- ¹HPE recommends using identical network adapters on both ends of the RoCE connection to avoid interoperability issue.
- 50G can be supported as either 2x25G NRZ or 1x50G PAM4 when using QSFP56. 100G can be supported as either 4x25G NRZ or 2x50G PAM4 when using QSFP56.
- For BCM57414, mixing link speeds of (10Gb/25Gb) between ports on a 2-port 25Gb device is not supported. (1G/10G and 1G/25G port speed mixing is supported).
- The 4-port BCM57504 does support mismatched/different (10Gb/25Gb) link speeds on different ports.



Standard Features

Table 4

| SKU | P08449-B21 ² | P21106-B21 ² | P28787-B21 | P28778-B21 |
|--|---|--|--|---|
| Description | Intel I350-T4 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE | Intel I350-T4 Ethernet 1Gb 4-port BASE-T Adapter for HPE | Intel X710-DA2 Ethernet 10Gb 2-port SFP+ Adapter for HPE | Intel X710-DA2 Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE |
| Card Type/Profile | OCP 3.0 | Stand up | Stand up | OCP 3.0 |
| ASIC/Chip | Intel® Ethernet Controller I350-AM4 | Intel® Ethernet Controller I350-AM4 | Intel® Ethernet Controller X710-BM2 | Intel® Ethernet Controller X710-BM2 |
| PCIe Version | PCIe 2.1 x4 | PCIe 2.1 x4 | PCIe 3.0 x8 | PCIe 3.0 x8 |
| Power Requirement | Typical: 4.6W Max: 5.2W | Typical: 5W Max: 6W | Typical: 3.3 W Max: 3.7 W | Typical: 2.9 W Max: 4.6 W |
| UEFI PXE Boot | √ | √ | √ | √ |
| Legacy BIOS PXE Boot | √ | √ | √ | √ |
| Wake-on-LAN (WOL) | √ | | | √ |
| Internet Protocol (IP) IPv4, IPv6 | √ | √ | √ | √ |
| Auto Negotiation | √ | √ | √ | √ |
| iSCSI Remote Boot | UEFI | UEFI | UEFI | UEFI |
| Tunnel Offload | VXLAN, NVGRE | VXLAN, NVGRE | VXLAN, GENEVE, NVGRE | VXLAN, GENEVE, NVGRE |
| RDMA¹ | | | | |
| Receive Side Scaling (RSS) | √ | √ | √ | √ |
| VMware NetQueue and Microsoft Virtual Machine Queue (VMQ) | √ | √ | √ | √ |
| NPAR | | | | |
| Single Root I/O Virtualization (SR-IOV) | 32VF's total | 32VF's total | 128 VF's total | 128 VF's total |
| Data Plane Development Kit (DPDK) | √ | √ | √ | √ |
| Root of Trust | | | | |
| Authenticated Updates | √ | √ | √ | √ |
| Secure Boot | √ | √ | | |
| Audit Log | | | | |
| Sanitization | √ | √ | √ | √ |

Notes:

- ¹HPE recommends using Identical network adapters on both ends of the RoCE connection to avoid interoperability issue
 - ²I350-T4 Adapter does not support thermal reading, which may result in higher fan noise when this card is installed.
- Please see customer advisory for additional details: **Document - Notice: (Revision) HPE ProLiant Gen10 Plus Servers - Fans Run At High Speed When the HPE 1GbE 4p BASE-T I350-T4 Adapter Is Installed In a PCI Slot | HPE Support**



Standard Features

| Table 5 | | | | |
|--|--|--|--|--|
| SKU | P08443-B21 | P10106-B21 | P08458-B21 | P41614-B21 |
| Description | Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE | Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE | Intel E810-XXVDA4 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE | Intel E810-XXVDA4 Ethernet 10/25Gb 4-port SFP28 OCP3 Adapter for HPE |
| Card Type/Profile | Stand up | OCP 3.0 | Stand up | OCP 3.0 |
| ASIC/Chip | Intel® E810-XXVAM2 | Intel® E810-XXVAM2 | Intel® Ethernet Controller E810-CAM1 | Intel® Ethernet Controller E810-CAM1 |
| PCIe Version | PCIe 4.0 x8 | PCIe 4.0 x8 | PCIe 4.0 x16 | PCIe 4.0 x16 |
| Power Requirement | Typical: 8.9 W Maximum: 9.7 W | Typical: 8.9 W Maximum: 10.1 W | Typical: 14.2 W Maximum: 16.7W | Typical: 14.6W Maximum: 18.2W |
| UEFI PXE Boot | √ | √ | √ | √ |
| Legacy BIOS PXE Boot | √ | √ | √ | √ |
| Wake-on-LAN (WOL) | | √ | | √ |
| Internet Protocol (IP) IPv4, IPv6 | √ | √ | √ | √ |
| Auto Negotiation | √ | √ | √ | √ |
| iSCSI Remote Boot | iSCSI boot supported (UEFI), iSCSI acceleration only supported with TCP acceleration | iSCSI boot supported (UEFI), iSCSI acceleration only supported with TCP acceleration | iSCSI boot supported (UEFI), iSCSI acceleration only supported with TCP acceleration | iSCSI boot supported (UEFI), iSCSI acceleration only supported with TCP acceleration |
| Tunnel Offload | VXLAN, GENEVE, and NVGRE | VXLAN, GENEVE, and NVGRE | VXLAN, GENEVE, and NVGRE | VXLAN, GENEVE, and NVGRE |
| RDMA¹ | (iWARP & RoCEv2) | (iWARP & RoCEv2) | (iWARP & RoCEv2) | iWARP & RoCEv2 |
| Receive Side Scaling (RSS) | √ | √ | √ | √ |
| VMware NetQueue and Microsoft Virtual Machine Queue (VMQ) | √ | √ | √ | √ |
| NPAR | | | | |
| Single Root I/O Virtualization (SR-IOV) | 256VFs/port, 2k Total | 256VFs/port, 2k Total | 256VFs/port, 2k Total | 256VFs/port, 2k Total |
| Data Plane Development Kit (DPDK) | √ | √ | √ | √ |
| Root of Trust | Hardware | Hardware | Hardware | Hardware |
| Authenticated Updates | √ | √ | √ | √ |
| Secure Boot | √ | √ | √ | √ |
| Audit Log | | | | |
| Sanitization | √ | √ | √ | √ |
| Notes: ¹ HPE recommends using identical network adapters on both ends of the RoCE connection to avoid interoperability issue | | | | |



Standard Features

| Table 6 | | | | |
|--|--|--|--|--|
| SKU | P21112-B21 ³ | P22767-B21 ³ | P41611-B21 | P41636-B21 |
| Description | Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 Adapter for HPE | Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 OCP3 Adapter for HPE | Intel E810-2CQDA2 Ethernet 100Gb 2-port QSFP28 Adapter for HPE | Intel E810-XXVDA4T Ethernet 10/25Gb 4-port SFP28 MCLK Adapter for HPE |
| Card Type/Profile | Stand up | OCP 3.0 | Stand up | Stand up |
| ASIC/Chip | Intel® Ethernet Controller E810-CAM2 | Intel® Ethernet Controller E810-CAM2 | Intel® Ethernet Controller E810-CAM1 | Intel® Ethernet Controller E810-CAM1 |
| PCIe Version | PCIe 4.0 x16 | PCIe 4.0 x16 | PCIe 4.0 x16 ² | PCIe 4.0 x16 |
| Power Requirement | Typical: 16.9W Maximum: 19.2W | Typical: 15.9W Maximum: 18.9W | Typical: 21.8W Maximum: 29.6W | Typical: 19.3 W Maximum: 24.9 W |
| UEFI PXE Boot | √ | √ | √ | √ |
| Legacy BIOS PXE Boot | √ | √ | √ | √ |
| Wake-on-LAN (WOL) | | √ | | |
| Internet Protocol (IP) IPv4, IPv6 | √ | √ | √ | √ |
| Auto Negotiation | √ | √ | √ | √ |
| iSCSI Remote Boot | iSCSI boot supported (UEFI), iSCSI acceleration only supported with TCP acceleration | iSCSI boot supported (UEFI), iSCSI acceleration only supported with TCP acceleration | iSCSI boot supported (UEFI), iSCSI acceleration only supported with TCP acceleration | iSCSI boot supported (UEFI), iSCSI acceleration only supported with TCP acceleration |
| Tunnel Offload | VXLAN, GENEVE, and NVGRE | VXLAN, GENEVE, and NVGRE | VXLAN, GENEVE, and NVGRE | VXLAN, GENEVE, and NVGRE |
| RDMA¹ | (iWARP & RoCEv2) | iWARP & RoCEv2 | iWARP & RoCEv2 | iWARP & RoCEv2 |
| Receive Side Scaling (RSS) | √ | √ | √ | √ |
| VMware NetQueue and Microsoft Virtual Machine Queue (VMQ) | √ | √ | √ | √ |
| NPAR | | | | |
| Single Root I/O Virtualization (SR-IOV) | 256VFs/port, 2k Total | 256VFs/port, 2k Total | 256VFs/port, 2k Total | 256VFs/port, 2k Total |
| Data Plane Development Kit (DPDK) | √ | √ | √ | √ |
| Root of Trust | Hardware | Hardware | Hardware | Hardware |
| Authenticated Updates | √ | √ | √ | √ |
| Secure Boot | √ | √ | √ | √ |
| Audit Log | | | | |
| Sanitization | √ | √ | √ | √ |
| Notes: | | | | |
| <ul style="list-style-type: none"> - ¹HPE recommends using identical network adapters on both ends of the RoCE connection to avoid interoperability issue - ²Bifurcated into two x8 PCIe links; iLO 5 2.55 and ROM 1.40 are needed for bifurcation - ³Maximum total throughput of 100Gb per adapter (across all ports) | | | | |



Standard Features

Table 7

| SKU | P21933-B21 | P10094-B21 | P10118-B21 | P22702-B21 |
|--|---|---|--|---|
| Description | Marvell QL41132HLCU Ethernet 10Gb 2-port SFP+ Adapter for HPE | Marvell QL41134HLCU Ethernet 10Gb 4-port SFP+ Adapter for HPE | Marvell QL41232HOCU Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE | Marvell QL41232HLCU Ethernet 10/25Gb 2-port SFP28 Adapter for HPE |
| Card Type/Profile | Stand up | Stand up | OCP 3.0 | Stand up |
| ASIC/Chip | Marvell QL41102-A2G | Marvell QL41104-A2G | Marvell QL41202-A2G | Marvell QL41202-A2G |
| PCIe Version | PCIe 3.0 x8 | PCIe 3.0 x8 | PCIe 3.0 x8 | PCIe 3.0 x8 |
| Power Requirement | Typical: 11.3 W Max: 13.1 W | Typical: 11.5 W Max: 13.6 W | Typical: 11.6 W Max: 13.5 W | Typical: 11.6 W Max: 13.5 W |
| UEFI PXE Boot | √ | √ | √ | √ |
| Legacy BIOS PXE Boot | √ | √ | √ | √ |
| Wake-on-LAN (WOL) | | | √ | |
| Internet Protocol (IP) IPv4, IPv6 | √ | √ | √ | √ |
| Auto Negotiation | | | 10Gb, 25Gb | 10Gb, 25Gb |
| iSCSI Remote Boot | UEFI | UEFI | UEFI | UEFI |
| Tunnel Offload | NVGRE, VXLAN, GRE, GENEVE | NVGRE, VXLAN, GRE, GENEVE | NVGRE, VXLAN, GRE, GENEVE | NVGRE, VXLAN, GRE, GENEVE |
| RDMA¹ | RoCEv1, RoCEv2, iWARP | RoCEv1, RoCEv2, iWARP | RoCEv1, RoCEv2, iWARP | RoCEv1, RoCEv2, iWARP |
| Receive Side Scaling (RSS) | √ | √ | √ | √ |
| VMware NetQueue and Microsoft Virtual Machine Queue (VMQ) | √ | √ | √ | √ |
| NPAR | √ | √ | √ | √ |
| Single Root I/O Virtualization (SR-IOV) | 192 VF's total | 192 VF's total | 192 VF's total | 192 VF's total |
| Data Plane Development Kit (DPDK) | √ | √ | √ | √ |
| Root of Trust | Firmware | Firmware | Firmware | Firmware |
| Authenticated Updates | √ | √ | √ | √ |
| Secure Boot | √ | √ | √ | √ |
| Audit Log | √ | √ | √ | √ |
| Sanitization | √ | √ | √ | √ |

Notes: ¹HPE recommends using Identical network adapters on both ends of the RoCE connection to avoid interoperability issue



Standard Features

| Table 8 | | | |
|--|---|---|--|
| SKU | P08452-B21 | P08437-B21 | P10103-B21 |
| Description | Marvell QL41132HQCUC Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE | Marvell QL41132HLRJ Ethernet 10Gb 2-port BASE-T Adapter for HPE | Marvell QL41132HQRJ Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE |
| Card Type/Profile | OCP 3.0 | Stand up | OCP 3.0 |
| ASIC/Chip | Marvell QL41102-A2G | Marvell QL41102-A2G | Marvell QL41102-A2G |
| PCIe Version | PCIe 3.0 x8 | PCIe 3.0 x8 | PCIe 3.0 x8 |
| Power Requirement | Typical: 11.6 W Max: 13.5 W | Typical: 21 W Max: 23 W | Typical: 20.1 W Max: 25 W |
| UEFI PXE Boot | √ | √ | √ |
| Legacy BIOS PXE Boot | √ | √ | √ |
| Wake-on-LAN (WOL) | √ | | √ |
| Internet Protocol (IP) IPv4, IPv6 | √ | √ | √ |
| Auto Negotiation | | 1Gb, 10Gb | 1Gb, 10Gb |
| iSCSI Remote Boot | UEFI | UEFI | UEFI |
| Tunnel Offload | NVGRE, VXLAN, GRE, GENEVE | NVGRE, VXLAN, GRE, GENEVE | NVGRE, VXLAN, GRE, GENEVE |
| RDMA¹ | RoCEv1, RoCEv2, iWARP | RoCEv1, RoCEv2, iWARP | RoCEv1, RoCEv2, iWARP |
| Receive Side Scaling (RSS) | √ | √ | √ |
| VMware NetQueue and Microsoft Virtual Machine Queue (VMQ) | √ | √ | √ |
| NPAR | √ | √ | √ |
| Single Root I/O Virtualization (SR-IOV) | 192 VF's total | 192 VF's total | 192 VF's total |
| Data Plane Development Kit (DPDK) | √ | √ | √ |
| Root of Trust | Firmware | Firmware | Firmware |
| Authenticated Updates | √ | √ | √ |
| Secure Boot | √ | √ | √ |
| Audit Log | √ | √ | √ |
| Sanitization | √ | √ | √ |

Notes: ¹HPE recommends using identical network adapters on both ends of the RoCE connection to avoid interoperability issue



Standard Features

Table 9

| SKU | P10180-B21 | P25960-B21 | P13188-B21 | P10112-B21 |
|--|--|--|---|--|
| Description | Mellanox MCX623105AS-VDAT Ethernet 200Gb 1-port QSFP56 Adapter for HPE | Mellanox MCX623106AS-CDAT Ethernet 100Gb 2-port QSFP56 Adapter for HPE | Mellanox MCX512F-ACHT Ethernet 10/25Gb 2-port SFP28 Adapter for HPE | Mellanox MCX562A-ACAI Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE |
| Card Type/Profile | Stand up | Stand up | Stand up | OCP 3.0 |
| ASIC/Chip | Mellanox MCX623105AS-VDAT | Mellanox MCX623106AS-CDAT | Mellanox MCX512F-ACHT | Mellanox MCX562A-ACAI |
| PCIe Version | PCIe 4x16 | PCIe 4x16 | PCIe 3.0 x16 | PCIe 3.0 x16 |
| Power Requirement | Typical: 13W Max: 18.4W | Typical: 13W Max: 18.4W | Typical: 8W Max: 10W | Typical: 6.3W Max: 8.9W |
| UEFI PXE Boot | √ | √ | √ | √ |
| Legacy BIOS PXE Boot | √ | √ | √ | √ |
| Wake-on-LAN (WOL) | | | | √ |
| Internet Protocol (IP) IPv4, IPv6 | √ | √ | √ | √ |
| Auto Negotiation | 1/10/25/40/50/100/200 Gb ² | 1/10/25/40/50/100 Gb | 10Gb, 25Gb | 10Gb, 25Gb |
| iSCSI Remote Boot | UEFI | UEFI | UEFI | UEFI |
| Tunnel Offload | VXLAN, NVGRE, GENEVE | VXLAN, NVGRE, GENEVE | VXLAN, NVGRE, GENEVE | VXLAN, NVGRE, GENEVE |
| RDMA¹ | RoCEv1, RoCEv2 | RoCEv1, RoCEv2 | RoCEv1, RoCEv2 | RoCEv1, RoCEv2 |
| Receive Side Scaling (RSS) | √ | √ | √ | √ |
| VMware NetQueue and Microsoft Virtual Machine Queue (VMQ) | √ | √ | √ | √ |
| NPAR | | | | |
| Single Root I/O Virtualization (SR-IOV) | 512 total, variable per port | 512 total, variable per port | 512 VF's total | 512 VF's total |
| Data Plane Development Kit (DPDK) | √ | √ | √ | √ |
| Root of Trust | Hardware | Hardware | Firmware | Firmware |
| Authenticated Updates | √ | √ | √ | √ |
| Secure Boot | √ | √ | √ | √ |
| Audit Log | √ | √ | √ | √ |
| Sanitization | | | √ | √ |

Notes: ¹HPE recommends using identical network adapters on both ends of the RoCE connection to avoid interoperability issue



Standard Features

Table 10

| SKU | P21927-B21 | P42044-B21 | P42041-B21 |
|--|---|---|--|
| Description | HPE Ethernet 100Gb 2-port QSFP28 MCX516A-CCHT Adapter | Mellanox MCX631102AS-ADAT Ethernet 10/25Gb 2-port SFP28 Adapter for HPE | Mellanox MCX631432AS-ADAI Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE |
| Card Type/Profile | Stand up | Stand up | OCP 3.0 |
| ASIC/Chip | Mellanox MCX516A -CCHT | Mellanox MCX631102AS-ADAT | Mellanox MCX631432AS-ADAI |
| PCIe Version | PCIe 3.0 x16 | PCIe 4x8 | PCIe 4x8 |
| Power Requirement | Typical: 6.3W Max: 8.9W | Typical: 13W Max: 18.4W | Typical: 13W Max: 18.4W |
| UEFI PXE Boot | √ | √ | √ |
| Legacy BIOS PXE Boot | √ | √ | √ |
| Wake-on-LAN (WOL) | | | √ |
| Internet Protocol (IP) IPv4, IPv6 | √ | √ | √ |
| Auto Negotiation | 1Gb,10Gb,25Gb,40Gb,50Gb,100Gb | 1/10/25Gb | 1/10/25Gb |
| iSCSI Remote Boot | UEFI | UEFI | UEFI |
| Tunnel Offload | VXLAN, NVGRE, GENEVE | VXLAN, NVGRE, GENEVE | VXLAN, NVGRE, GENEVE |
| RDMA¹ | RoCEv1, RoCEv2 | RoCEv1, RoCEv2 | RoCEv1, RoCEv2 |
| Receive Side Scaling (RSS) | √ | √ | √ |
| VMware NetQueue and Microsoft Virtual Machine Queue (VMQ) | √ | √ | √ |
| NPAR | | | |
| Single Root I/O Virtualization (SR-IOV) | 512 VF's total | 512 total, variable per port | 512 total, variable per port |
| Data Plane Development Kit (DPDK) | √ | √ | √ |
| Root of Trust | Firmware | Hardware | Hardware |
| Authenticated Updates | √ | √ | √ |
| Secure Boot | √ | √ | √ |
| Audit Log | √ | √ | √ |
| Sanitization | √ | | |
| Notes: ¹ HPE recommends using identical network adapters on both ends of the RoCE connection to avoid interoperability issue | | | |



Standard Features

Table 11

| | |
|--|---|
| Xilinx X2522-25G-PLUS Ethernet 10/25Gb 2-port SFP28 Adapter for HPE | P21109-B21 |
| Description | Xilinx X2522-25G-PLUS Ethernet 10/25Gb 2-port SFP28 Adapter for HPE |
| Card Type/Profile | Stand up |
| ASIC/Chip | Solarflare X2522-25G-PLUS |
| PCIe Version | PCIe 3.0 x8 |
| Power Requirement | Typical: 14W Max: 17.5W |
| UEFI PXE Boot | √ |
| Legacy BIOS PXE Boot | √ |
| Wake-on-LAN (WOL) | |
| Internet Protocol (IP) IPv4, IPv6 | √ |
| Auto Negotiation | 10Gb, 25Gb |
| iSCSI Remote Boot | UEFI |
| Tunnel Offload | VXLAN, NVGRE, GENEVE |
| RDMA¹ | RoCEv1, RoCEv2 |
| Receive Side Scaling (RSS) | √ |
| VMware NetQueue and Microsoft Virtual Machine Queue (VMQ) | √ |
| NPAR | |
| Single Root I/O Virtualization (SR-IOV) | 240 VF's total |
| Data Plane Development Kit (DPDK) | √ |
| Root of Trust | Firmware |
| Authenticated Updates | √ |
| Secure Boot | √ |
| Audit Log | √ |
| Sanitization | √ |

Notes: ¹HPE recommends using identical network adapters on both ends of the RoCE connection to avoid interoperability issue



Standard Features

Audit Logs

Audit Logs are a forensics capability that provides traceability into authenticated firmware updates by capturing changes in standard system logs.

Authenticated Updates

Authenticated Updates brings cryptographic keys onto the NIC (for HW Authentication) to protect user and configuration data from unauthorized access and verify digitally signed firmware.

Auto-negotiation

Automatically senses the speed of the device to which it is attached. It also automatically configures for half or full duplex, depending on the duplex mode of the switch, hub, or router connected to the adapter.

DPDK

DPDK with benefit for packet processing acceleration and use in NFV deployments.

IPv6

IPv6 uses 128-bit addressing allowing for more devices and users on the internet. IPv4 supported 32-bit addressing.

iWARP RDMA

Delivers RDMA on top of the pervasive TCP/IP protocol. iWARP RDMA runs over standard network and transport layers and works with all Ethernet network infrastructure. TCP provides flow control and congestion management and does not require a lossless Ethernet network. iWARP is a highly routable and scalable RDMA implementation.

Network Partitioning (NPAR)

Network Partitioning (NPAR) allowing administrators to configure a 10 Gb port as four separate partitions or physical functions. Each PCI function is associated with a different virtual NIC. To the OS and the network, each physical function appears as a separate NIC port.

Optimized for Virtualization

I/O Virtualization support for VMware NetQueue and Microsoft VMQ helps meet the performance demands of consolidated virtual workloads.

Preboot eXecution Environment (PXE)

Support for PXE enables automatic deployment of computing resources remotely from anywhere. It allows a new or existing server to boot over the network and download software, including the operating system, from a management/ deployment server at another location on the network.

Additionally, PXE enables decentralized software distribution and remote troubleshooting and repairs.

Root of Trust

Root of Trust enables a chain of trust for Authenticating updates to firmware via signature validation. This blocks installation of rogue or corrupted firmware and ensures that the executing firmware is trusted.

RDMA

Remote Direct memory Access (RDMA) is an accelerated I/O delivery mechanism that allows data to be transferred directly from the user memory of the source server to the user memory of the destination server bypassing the operating system (OS) kernel. Because the RDMA data transfer is performed by the DMA engine on the adapter's network processor, the CPU is not used for the data movement, freeing it to perform other tasks such as hosting more virtual workloads (increased VM density). RDMA protocols include RoCEv1, RoCEv2 and iWARP. All of these protocols reduce overall latency to deliver accelerated performance for applications such as Microsoft Hyper-V Live Migration, Microsoft SQL and Microsoft SharePoint with SMB Direct.



Standard Features

Receive Side Scaling (RSS)

RSS resolves the single-processor bottleneck by allowing the receive side network load from a network adapter to be shared across multiple processors. RSS enables packet receive-processing to scale with the number of available processors.

Sanitization

Sanitization (Secure User Data Erase) renders User and configuration data on the NIC irretrievable so that NICs can be safely repurposed or disposed.

Secure Boot

Secure Boot safeguards the system and ensures no rogue drivers are being executed on start-up.

Single-Root I/O Virtualization

Single-Root I/O Virtualization (SR-IOV) provides a mechanism to bypass the host system hypervisor in virtual environments providing near metal performance and server efficiency. SR-IOV provides mechanism to create multiple Virtual Functions (VFs) to share single PCIe resources. The device is capable of SR-IOV, and requires Server BIOS support, controller firmware, and OS support.

TCP/UDP/IP

TCP/IP offloading techniques including: TCP/IP, UDP checksum offload (TCO) moves the TCP and IP checksum offloading from the CPU to the network adapter. Large send offload (LSO) or TCP segmentation offload (TSO) allows the TCP segmentation to be handled by the adapter rather than the CPU

Tunnel Offload

Minimize the impact of overlay networking on host performance with tunnel offload support for VXLAN, NVGRE and GENEVE. By offloading packet processing to adapters, customers can use overlay networking to increase VM migration flexibility and virtualized overlay networks with minimal impact to performance. HPE Tunnel Offloading increases I/O throughput, reduces CPU utilization, and lowers power consumption. Tunnel Offload supports VMware's VXLAN, Microsoft's NVGRE solutions and Generic Network Virtualization Encapsulation (GENEVE) solutions.

VMware NetQueue and Microsoft Virtual Machine Queue (VMQ)

VMware NetQueue is technology that significantly improves performance of 10 Gigabit Ethernet network adapters in virtualized environments. Windows Hyper-V VMQ (VMQ) is a feature available on servers running Windows Server 2008 R2 with VMQ-enabled Ethernet adapters. VMQ uses hardware packet filtering to deliver packet data from an external virtual machine network directly to virtual machines, which reduces the overhead of routing packets and copying them from the management operating system to the virtual machine.

Wake-on-LAN

Wake-on-LAN (WoL) support through the PCI Express bus. A system that supports Wake-on-LAN can remain available to the systems administrator during its normal downtime. Once the machine is awakened, the systems administrator can remotely control, audit, debug, or manage the machine.

Warranty

Maximum: The remaining warranty of the HPE product in which it is installed (to a maximum three-year, limited warranty).

Minimum: One year limited warranty.

Notes: Additional information regarding worldwide limited warranty and technical support is available at:

<http://h17007.www1.hp.com/us/en/enterprise/servers/warranty/index.aspx#.V4e3tPkrJhE>



Standard Features

Server support

Networking Adapters below are supported on select HPE ProLiant DL110/325/345/360/365/380/385 & Apollo2000/4200/6500 Gen10 Plus Servers

- Broadcom BCM5719 Ethernet 1Gb 4-port Base-T Adapter for HPE
- Broadcom BCM5719 Ethernet 1Gb 4-port Base-T OCP3 Adapter for HPE
- Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE
- Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE
- Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ Adapter for HPE
- Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE
- Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE
- Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE
- Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE
- Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 OCP3 Adapter for HPE
- Intel I350-T4 Ethernet 1Gb 4-port BASE-T Adapter for HPE
- Intel I350-T4 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE
- Intel X710-DA2 Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE
- Intel X710-DA2 Ethernet 10Gb 2-port SFP+ Adapter for HPE
- Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE
- Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE
- Intel E810-XXVDA4 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE
- Intel E810-XXVDA4 Ethernet 10/25Gb 4-port SFP28 OCP3 Adapter for HPE (Only DL110 Gen10 Plus)
- Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 Adapter for HPE
- Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 OCP3 Adapter for HPE
- Intel E810-2CQDA2 Ethernet 100Gb 2-port QSFP28 Adapter for HPE (Only DL110 Gen10 Plus)
- Marvell QL41132HLRJ Ethernet 10Gb 2-port BASE-T Adapter for HPE
- Marvell QL41132HQRJ Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE
- Marvell QL41132HLCU Ethernet 10Gb 2-port SFP+ Adapter for HPE
- Marvell QL41132HQCU Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE
- Marvell QL41134HLCU Ethernet 10Gb 4-port SFP+ Adapter for HPE
- Marvell QL41232HLCU Ethernet 10/25Gb 2-port SFP28 Adapter for HPE
- Marvell QL41232HQCU Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE
- Mellanox MCX512F-ACHT Ethernet 10/25Gb 2-port SFP28 Adapter for HPE
- Mellanox MCX562A-ACAI Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE
- HPE Ethernet 100Gb 2-port QSFP28 MCX516A-CCHT Adapter(Only DL325/385/Apollo 2000 Gen10 Plus)
- Mellanox MCX623106AS-CDAT Ethernet 100Gb 2-port QSFP56 Adapter for HPE
- Mellanox MCX623105AS-VDAT Ethernet 200Gb 1-port QSFP56 Adapter for HPE
- Mellanox MCX631102AS-ADAT Ethernet 10/25Gb 2-port SFP28 Adapter for HPE
- Mellanox MCX631432AS-ADAI Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE
- Xilinx X2522-25G Ethernet 10/25Gb 2-port SFP28 Adapter for HPE
- Xilinx X2522-25G-PLUS Ethernet 10/25Gb 2-port SFP28 Adapter for HPE



Service and Support

HPE Pointnext - Service and Support

Get the most from your HPE Products. Get the expertise you need at every step of your IT journey with **HPE Pointnext Services**. We help you lower your risks and overall costs using automation and methodologies that have been tested and refined by HPE experts through thousands of deployments globally. HPE Pointnext **Advisory Services** focus on your business outcomes and goals, partnering with you to design your transformation and build a roadmap tuned to your unique challenges. Our **Operational Services** can be leveraged to speed up time-to-production, boost performance and accelerate your business. HPE Pointnext specializes in flawless and on-time implementation, on-budget execution, and creative configurations that get the most out of software and hardware alike.

Consume IT on your terms

HPE GreenLake brings the cloud experience directly to your apps and data wherever they are—the edge, colocations, or your data center. It delivers cloud services for on-premises IT infrastructure specifically tailored to your most demanding workloads. With a pay-per-use, scalable, point-and-click self-service experience that is managed for you, HPE GreenLake accelerates digital transformation in a distributed, edge-to-cloud world.

- Get faster time to market
- Save on TCO, align costs to business
- Scale quickly, meet unpredictable demand
- Simplify IT operations across your data centers and clouds

Managed services to run your IT operations

HPE GreenLake Management Services provides services that monitor, operate, and optimize your infrastructure and applications, delivered consistently and globally to give you unified control and let you focus on innovation.

Recommended Services

HPE Pointnext Tech Care.

HPE Pointnext Tech Care is the new operational service experience for HPE products. Tech Care goes beyond traditional support by providing access to product specific experts, an AI driven digital experience, and general technical guidance to not only reduce risk but constantly search for ways to do things better. HPE Pointnext Tech Care has been reimagined from the ground up to support a customer-centric, AI driven, and digitally enabled customer experience to move your business forward. HPE Pointnext Tech Care is available in three response levels. Basic, which provides 9x5 business hour availability and a 2 hour response time. Essential which provides a 15 minute response time 24x7 for most enterprise level customers, and Critical which includes a 6 hour repair commitment where available and outage management response for severity 1 incidents.

<https://www.hpe.com/services/techcare>

HPE Pointnext Complete Care

HPE Pointnext Complete Care is a modular, edge-to-cloud IT environment service that provides a holistic approach to optimizing your entire IT environment and achieving agreed upon IT outcomes and business goals through a personalized and customer-centric experience. All delivered by an assigned team of HPE Pointnext Services experts. HPE Pointnext Complete Care provides:

- A complete coverage approach -- edge to cloud
- An assigned HPE team
- Modular and fully personalized engagement
- Enhanced Incident Management experience with priority access
- Digitally enabled and AI driven customer experience

<https://www.hpe.com/services/complecare>



Service and Support

Warranty

Maximum: The remaining warranty of the HPE product in which it is installed (to a maximum three-year, limited warranty).
Minimum: One year limited warranty.

Notes: Additional information regarding worldwide limited warranty and technical support is available at:
<http://h17007.www1.hpe.com/us/en/enterprise/servers/warranty/index.aspx#.V4e3tPkrJhE>

Service and Support

Notes: This adapter is covered under HPE Operational Support Services/ Service Contract applied to the HPE ProLiant Server or enclosure. No separate HPE Operational Support Services need to be purchased.

Most HPE branded options sourced from HPE that are compatible with your product will be covered under your main product support at the same level of coverage, allowing you to upgrade freely. Additional support is required on select workload accelerators, switches, racks and UPS options 12KVA and over. Coverage of the UPS battery is not included under HPE support services; standard warranty terms and conditions apply.

Warranty and Operational Support Services

Warranty and Support Services will extend to include HPE options configured with your server or storage device. The price of support service is not impacted by configuration details. HPE sourced options that are compatible with your product will be covered under your server support at the same level of coverage allowing you to upgrade freely. Installation for HPE options is available as needed. To keep support costs low for everyone, some high value options will require additional support. Additional support is only required on select high value workload accelerators, fibre switches, InfiniBand and UPS options 12KVA and over. Coverage of the UPS battery is not included under TS support services; standard warranty terms and conditions apply.

Protect your business beyond warranty with HPE Operational Support Services

HPE Pointnext Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to HPE to help prevent problems and solve issues faster. HPE Operational Support Services enable you to choose the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement to the support you need for your IT and business.

Protect your product, beyond warranty.

Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

For more information

Visit the Hewlett Packard Enterprise Operational Support Services [website](#).



Technical Specifications

Operating System and Virtualization Support

The Operating Systems supported by this adapter are based on the server OS support. Please refer to the OS Support Matrix at <https://www.hpe.com/us/en/servers/server-operating-systems.html>

Drivers and Software Download (Please use hyperlinks below)

- [Broadcom BCM5719 Ethernet 1Gb 4-port Base-T Adapter for HPE](#)
- [Broadcom BCM5719 Ethernet 1Gb 4-port Base-T OCP3 Adapter for HPE](#)
- [Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE](#)
- [Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE](#)
- [Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE](#)
- [Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ Adapter for HPE](#)
- [Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE](#)
- [Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE](#)
- [Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE](#)
- [Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE](#)
- [Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 OCP3 Adapter for HPE](#)
- [Intel I350-T4 Ethernet 1Gb 4-port BASE-T Adapter for HPE](#)
- [Intel I350-T4 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE](#)
- [Intel X710-DA2 Ethernet 10Gb 2-port SFP+ Adapter for HPE](#)
- [Intel X710-DA2 Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE](#)
- [Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE](#)
- [Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE](#)
- [Intel E810-XXVDA4 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE](#)
- [Intel E810-XXVDA4 Ethernet 10/25Gb 4-port SFP28 OCP3 Adapter for HPE](#)
- [Intel E810-XXVDA4T Ethernet 10/25Gb 4-port SFP28 MCLK Adapter for HPE](#)
- [Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 Adapter for HPE](#)
- [Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 OCP3 Adapter for HPE](#)
- [Intel E810-2CQDA2 Ethernet 100Gb 2-port QSFP28 Adapter for HPE](#)
- [Marvell QL41132HLRJ Ethernet 10Gb 2-port BASE-T Adapter for HPE](#)
- [Marvell QL41132HQRJ Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE](#)
- [Marvell QL41132HLCU Ethernet 10Gb 2-port SFP+ Adapter for HPE](#)
- [Marvell QL41132HVCU Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE](#)
- [Marvell QL41134HLCU Ethernet 10Gb 4-port SFP+ Adapter for HPE](#)
- [Marvell QL41232HLCU Ethernet 10/25Gb 2-port SFP28 Adapter for HPE](#)
- [Marvell QL41232HVCU Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE](#)
- [Mellanox MCX512F-ACHT Ethernet 10/25Gb 2-port SFP28 Adapter for HPE](#)
- [Mellanox MCX562A-ACAI Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE](#)
- [HPE Ethernet 100Gb 2-port QSFP28 MCX516A-CCHT Adapter](#)
- [Mellanox MCX623106AS-CDAT Ethernet 100Gb 2-port QSFP56 Adapter for HPE](#)
- [Mellanox MCX623105AS-VDAT Ethernet 200Gb 1-port QSFP56 Adapter for HPE](#)
- [Mellanox MCX631102AS-ADAT Ethernet 10/25Gb 2-port SFP28 Adapter for HPE](#)
- [Mellanox MCX631432AS-ADAI Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE](#)
- [Xilinx X2522-25G Ethernet 10/25Gb 2-port SFP28 Adapter for HPE](#)
- [Xilinx X2522-25G-PLUS Ethernet 10/25Gb 2-port SFP28 Adapter for HPE](#)



Technical Specifications

To access Vendor Technical Specifications, please visit the following hyperlinks:

- [Broadcom BCM5719 Ethernet 1Gb 4-port Base-T Adapter for HPE](#)
- [Broadcom BCM5719 Ethernet 1Gb 4-port Base-T OCP3 Adapter for HPE](#)
- [Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE](#)
- [Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ Adapter for HPE](#)
- [Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE](#)
- [Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE](#)
- [Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE](#)
- [Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE](#)
- [Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 OCP3 Adapter for HPE](#)
- [Intel I350-T4 Ethernet 1Gb 4-port BASE-T Adapter for HPE](#)
- [Intel I350-T4 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE](#)
- [Intel X710-DA2 Ethernet 10Gb 2-port SFP+ Adapter for HPE](#)
- [Intel X710-DA2 Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE](#)
- [Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE](#)
- [Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE](#)
- [Intel E810-XXVDA4 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE](#)
- [Intel E810-XXVDA4 Ethernet 10/25Gb 4-port SFP28 OCP3 Adapter for HPE](#)
- [Intel E810-XXVDA4T Ethernet 10/25Gb 4-port SFP28 MCLK Adapter for HPE](#)
- [Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 Adapter for HPE](#)
- [Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 OCP3 Adapter for HPE](#)
- [Intel E810-2CQDA2 Ethernet 100Gb 2-port QSFP28 Adapter for HPE](#)
- [Marvell QL41132HLRJ Ethernet 10Gb 2-port BASE-T Adapter for HPE](#)
- [Marvell QL41132HQRJ Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE](#)
- [Marvell QL41132HLCU Ethernet 10Gb 2-port SFP+ Adapter for HPE](#)
- [Marvell QL41132HVCU Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE](#)
- [Marvell QL41134HLCU Ethernet 10Gb 4-port SFP+ Adapter for HPE](#)
- [Marvell QL41232HLCU Ethernet 10/25Gb 2-port SFP28 Adapter for HPE](#)
- [Marvell QL41232HVCU Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE](#)
- [Mellanox MCX512F-ACHT Ethernet 10/25Gb 2-port SFP28 Adapter for HPE](#)
- [Mellanox MCX562A-ACAI Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE](#)
- [HPE Ethernet 100Gb 2-port QSFP28 MCX516A-CCHT Adapter](#)
- [Mellanox MCX623106AS-CDAT Ethernet 100Gb 2-port QSFP56 Adapter for HPE](#)
- [Mellanox MCX623105AS-VDAT Ethernet 200Gb 1-port QSFP56 Adapter for HPE](#)
- [Mellanox MCX631102AS-ADAT Ethernet 10/25Gb 2-port SFP28 Adapter for HPE](#)
- [Mellanox MCX631432AS-ADAI Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE](#)
- [Xilinx X2522-25G Ethernet 10/25Gb 2-port SFP28 Adapter for HPE](#)
- [Xilinx X2522-25G-PLUS Ethernet 10/25Gb 2-port SFP28 Adapter for HPE](#)



Technical Specifications

Transceiver and Cable Options

Please refer to matrix: <https://psnow.ext.hpe.com/doc/a00002507enw>

Environment-friendly Products and Approach - End-of-life Management and Recycling

Hewlett Packard Enterprise offers end-of-life **product return, trade-in, and recycling programs**, in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE Directive (2012/19/EU) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the **Hewlett Packard Enterprise web site**.

These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.






Summary of Changes

| Date | Version History | Action | Description of Change |
|-------------|-----------------|---------|---|
| 10-Jul-2023 | Version 21 | Changed | Standard Features, Service and Support Sections were updated |
| 05-Jun-2023 | Version 20 | Changed | Standard Features section was updated |
| 14-Nov-2022 | Version 19 | Changed | Updated drivers and support download links |
| 03-Oct-2022 | Version 18 | Changed | Models were updated |
| 06-Sep-2022 | Version 17 | Changed | Added P26269-B21, P26264-B21, P41636-B21, and updated links |
| 06-Jun-2022 | Version 16 | Changed | Added P51178-B21, P51181-B21 |
| 02-May-2022 | Version 15 | Changed | SKUs were removed and updated |
| 04-Apr-2022 | Version 14 | Changed | Models were updated |
| 07-Feb-2021 | Version 13 | Changed | Added P42041 and P42044 CX6-LX 10/25Gb 2-port |
| 01-Nov-2021 | Version 12 | Changed | Standard Features, Service and Support Sections were updated |
| 04-Oct-2021 | Version 11 | Changed | Standard Features Section was updated |
| 02-Aug-2021 | Version 10 | Changed | Models Section and SKUs were updated |
| 07-Jun-2021 | Version 9 | Changed | Added NPAR and Legacy BIOS PXE Boot features to selected NICs |
| 17-May-2021 | Version 8 | Changed | Overview Section and Models were updated |
| 06-Apr-2021 | Version 7 | Changed | Models and Standard Features Sections were updated |
| 05-Oct-2020 | Version 6 | Changed | Overview and Standard Features Sections were updated |
| 01-Jun-2020 | Version 5 | Changed | Standard Features Section was updated, added feature definition |
| 20-Apr-2020 | Version 4 | Changed | Standard Features Section was updated |
| 06-Apr-2020 | Version 3 | Changed | Added tables for feature, add X2522-25G |
| 16-Dec-2019 | Version 2 | Changed | Overview and Technical Specifications sections were updated |
| 02-Dec-2019 | Version 1 | New | New QuickSpecs |



Copyright

Make the right purchase decision.
Contact our presales specialists.

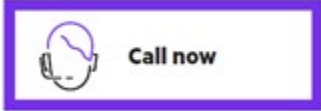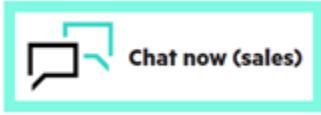

© Copyright 2023 Hewlett Packard Enterprise Development L.P. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

a00073559enw - 16507 - Worldwide - V21 - 10-July-2023