

## Key Features


- 2nd generation laser phosphor technology with up to 30,000 hours lifespan
- 4,200 ANSI Lumens offering bright images in any environment
- Up to 300" ultra large screen that is easily installed and set up
- 0.49 short throw for immersive edge blending without any shadows
- Installation flexibility:
   H/V keystone, 4 corner
   adjustment, 360°
   projection and portrait
   mode



## Product **Description**

The Luminous Superior series is ViewSonic's lamp-free high brightness projector for both business and education. The LS710HD adopts industry-leading 2nd generation laser phosphor technology, delivers 4,200 ANSI Lumens while eliminating the use of toxic mercury, reducing the cost and effort of frequent lamp replacement and lowering total cost of ownership. The lamp-free light source offers enhanced sustainability for a greener environment while delivering clear and bright images with vivid colors and 1080p resolution. Boasting short throw ratio, flexible installation and easy image adjustments, the projector enables effortless edge blending to create an immersive experience for any space, be it a restaurant, gym, gallery, etc. With 0.49 short throw ratio, the projector can provide 100" large screen size from only 1.1 m away without being bothered by the shadows.

The LS710HD allows perfectly-shaped images even from an angled projection with H/V keystone and 4 corner correction and offers versatile application with 360° projection and portrait mode. The projector also comes with HDMI 2.0b, ensuring you access to original 4K quality content with HDR/HLG support.

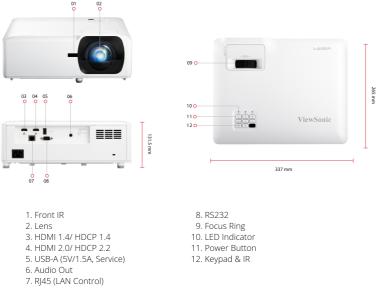

## **Visit Us**

www.viewsonic.com

SPECIFICATION		OTHERS	
Native Resolution:	1920x1080	Power Supply Voltage:	100-240V+/- 10%, 50/60Hz (AC in)
Brightness:	4200 (ANSI Lumens)		
Contrast Ratio:	3000000:1	Power Consumption:	Normal: 245W Standby: <0.5W
Display Color:	1.07 Billion Colors	Operating Temperature:	0~40°C
Light Source Type:	Laser Phosphor	Carton:	Brown
Light Source Life (hours) with Normal Mode:	20000	Net Weight:	4.5kg
Light Source Life (hours) with SuperEco Mode:	30000 (Eco)	Gross Weight:	6.6kg
Lens:	F=2.8, f=7.51mm	Dimensions (WxDxH) with Adjustment Foot:	337x265x131.5mm
Projection Offset:	132%+/-5%	Packing Dimensions:	496x195x387mm
Throw Ratio:	0.49	OSD Language:	English, French, German, Spanish, Italian, Portuguese, Dutch, Swedish, Finnish, Greek, Norwegian/Danish, Polish, Russian, Simplified_Chinese, Traditional_Chinese, Korean, Arabic, Japanese, Thai, Hungarian, Czechoslovak, Turkish, Farsi. Vietnamese, Indonesian, Romanian, Slovakian, total 27 languages
Optical Zoom:	Fixed		
Digital Zoom:	0.8x-2.0x		
Image Size:	40"-300"		
Throw Distance:	0.43-3.25m (100"@1.08m)		
Keystone:	H:+/-15° , V:+/-15°		
Audible Noise (Normal):	34dB		
Audible Noise (Eco):	31dB		
Input Lag:	49.9ms		
Resolution Support:	VGA(640 x 480) to 4K UHD(3840 x 2160)	User Guide Language:	English, S-Chinese, T-Chinese, Indonesian, Finish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Arabic, Czech, Thai,
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 4K UHD		
Horizontal Frequency:	15K-102KHz		
Vertical Scan Rate:	23-120Hz		
INPUT			Vietnamese, total 20 languages
HDMI:	2 (HDMI 2.0/ HDCP 2.2 HDMI 1.4/ HDCP 1.4)	STANDARD ACCESSORY	
		Power Cord:	1
OUTPUT		Remote Control:	1
Audio-out (3.5mm):	1	QSG:	Yes
Speaker:	15W x2	Warranty Card:	Yes (CN Only)
USB Type A (Power):	1 (5V/1.5A)	OPTIONAL ACCESSORY	
CONTROL		Wall/Ceiling Mount:	PJ-WMK-007
RS232 (DB 9-pin male):	1		
RJ45 (LAN control):	1		
USB Type A (Services):	1 (share with USB A Output)		