

## PRODUCT DATASHEET

### VALUE CLAS P 60 FR 6.5 W/2700 K E14

LED VALUE CLASSIC P | LED lamps, classic mini-ball shape



#### Areas of application

- General illumination
- Domestic applications
- Outdoor use in suitable outdoor luminaires only

#### Product benefits

- Lower energy consumption than incandescent or halogen lamps
- Simple direct replacement for conventional incandescent lamps
- Instant 100 % light, no warm-up time

#### Product features

- LED alternative to conventional lamps
- Not dimmable
- Good color rendering ( $R_a \geq 80$ ) and color stability throughout the life of the lamp




---

**TECHNICAL DATA****Electrical data**


Nominal wattage	6.5 W
Construction wattage	6.50 W
Nominal voltage	220...240 V
Claimed equiv. conventional lamp power	60 W
Nominal current	55 mA
Type of current	AC
Inrush current	10 A
Operating frequency	50...60 Hz
Mains frequency	50...60 Hz
Max. lamp number on MCB B10 A	140
Max. lamp number on MCB B16 A	228
Total harmonic distortion	115 %
Power factor $\lambda$	0.67

**Photometrical data**

Luminous flux	806 lm
Luminous efficacy	124 lm/W
Lumen main.fact.at end of nom.life time	0.93
Light color (designation)	Warm White
Color temperature	2700 K
Color rendering index Ra	80
Light color	827
Standard deviation of color matching	$\leq 6$ sdc <sub>m</sub>
Flickering metric (Pst LM)	1.0
Stroboscope effect metric (SVM)	0.9

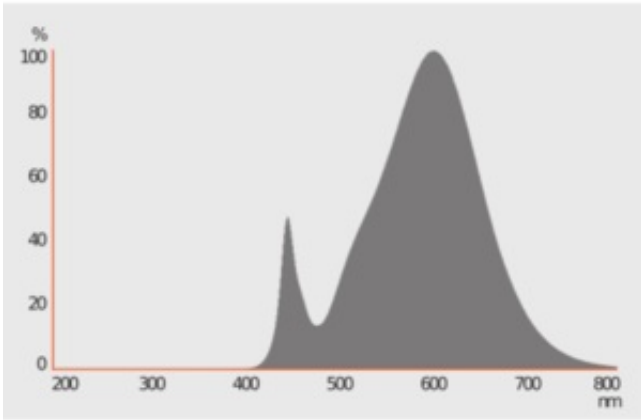

349927\_2700K\_EvI\_5630.eps

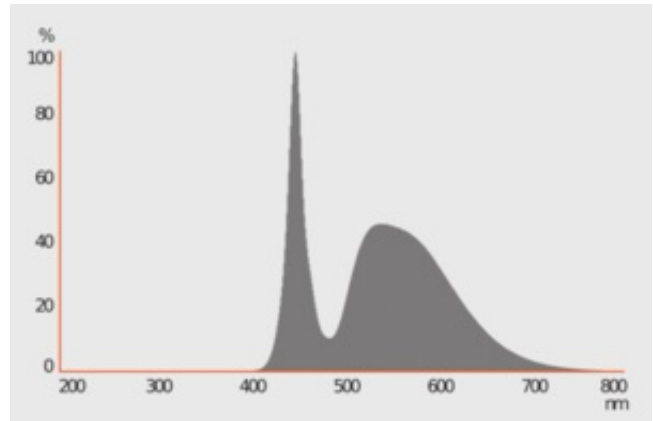


LISO spectral power distribution 6500K CRI80 v2

Light technical data

Beam angle	150 °
Warm-up time (60 %)	< 0.50 s
Starting time	< 0.5 s

Dimensions & Weight

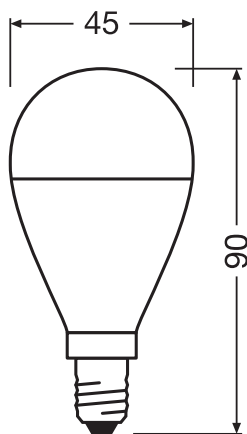

Overall length	82.00 mm
Diameter	45.00 mm
Maximum diameter	45 mm
Product weight	17.00 g

### Temperatures & operating conditions

Ambient temperature range	-20...+40 °C
Maximum temperature at tc test point	85 °C

### Lifespan

Lifespan L70/B50 at 25 °C	10000 h
Number of switching cycles	100000
Lumen maintenance at end of service lifetime	0.93

### Additional product data

Base (standard designation)	E14
Mercury content	0.0 mg
Mercury-free	Yes
Design / version	Frosted
Product remark	All technical parameters apply to the entire lamp / Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

### Capabilities

Dimmable	No
----------	----

### Certificates & Standards

Energy efficiency class	E 1)
Energy consumption	7.00 kWh/1000h
Type of protection	IP20
Standards	ROHS 2.0 / REACH / CE / CB / ERP
Photobiological safety group acc. to EN62778	RG1

1) Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)

### Country-specific categorizations

Order reference	VALUECLP60 6,5W
-----------------	-----------------




## LOGISTICAL DATA



Temperature range at storage	-20...+80 °C
------------------------------	--------------

## Energy labelling regulation data acc EU 2019/2015

Lighting technology used	LED
Non-directional or directional	NDLS
Mains or non-mains	MLS
Light source cap-type (or other electric interface)	E14
Connected light source (CLS)	No
Color-tuneable light source	No
Envelope	No
High luminance light source	No
Anti-glare shield	No
Correlated colour temperature type	SINGLE_VALUE
Standby power	0.00
Claim of equivalent power	Yes
Length	82.00 mm
Height	45.00 mm
Width	45.00 mm
Chromaticity coordinate x	0.458
Chromaticity coordinate y	0.410
R9 Colour rendering index	0.00
Beam angle correspondence	SPHERE_360
Survival factor	0.90
Displacement factor	0.50
LED light source replaces a fluorescent light source	No
EPREL ID	1403245,523327,1381392,1857032,1855170
Model number	AC31169,AC44941,AC24733,AC56461,AC56002

## DOWNLOAD DATA

Photometric and lighting design files	Document name
 IES file (IES)	AC10133_CLP60 8W 220-240V FR E14
 LDT file (Eulumdat)	AC10133_CLP60 8W 220-240V FR E14
 LDC typ polar	VALUECLP60 8W 827 230VFR E14 FS1 OSRAM

Photometric and lighting design files		Document name
	Spectral power distribution	349927_2700K_Evl_5630.eps
	Spectral power distribution	LISO spectral power distribution 6500K CRI80 v2

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075152939	Folding box 1	46 mm x 46 mm x 80 mm	26.00 g	0.17 dm <sup>3</sup>
4058075152946	Shipping box 10	245 mm x 104 mm x 96 mm	316.00 g	2.45 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.