

## PRODUCT DATASHEET VALUE CLAS A 100 FR 13 W/2700 K E27

LED VALUE CLASSIC A | LED lamps, classic bulb shape



### Areas of application

- Domestic applications
- General illumination
- Outdoor use in suitable outdoor luminaires only

### Product benefits

- Lower energy consumption than incandescent or halogen lamps
- Can be easily fitted instead of ordinary light bulbs

### Product features

- LED alternative to conventional lamps
- Not dimmable
- Good color rendering ( $R_a \geq 80$ ) and color stability throughout the life of the lamp




---

**TECHNICAL DATA****Electrical data**


Nominal wattage	13 W
Construction wattage	13.00 W
Nominal voltage	220...240 V
Claimed equiv. conventional lamp power	100 W
Nominal current	105 mA
Type of current	AC
Inrush current	10 A
Operating frequency	50...60 Hz
Mains frequency	50...60 Hz
Max. lamp number on MCB B10 A	80
Max. lamp number on MCB B16 A	128
Total harmonic distortion	106.70 %
Power factor $\lambda$	> 0.50

**Photometrical data**

Luminous flux	1521 lm
Nominal useful luminous flux 90°	1521 lm
Luminous efficacy	117 lm/W
Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Warm White
Color temperature	2700 K
Color rendering index Ra	≥80
Light color	827
Standard deviation of color matching	≤6 sdcn
Rated LLMF at 6,000 h	0.80
Flickering metric (Pst LM)	1.0
Stroboscope effect metric (SVM)	0.9

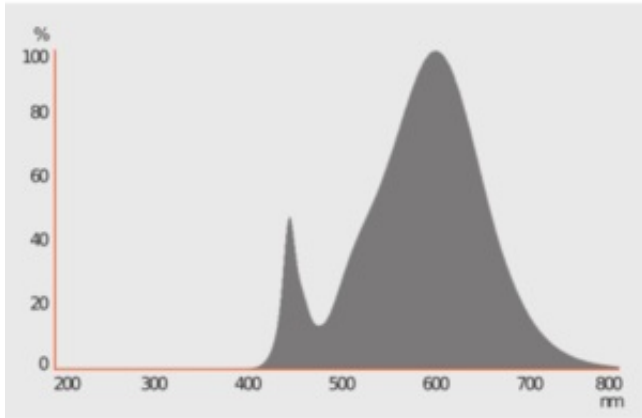

349927\_2700K\_Evl\_5630.eps

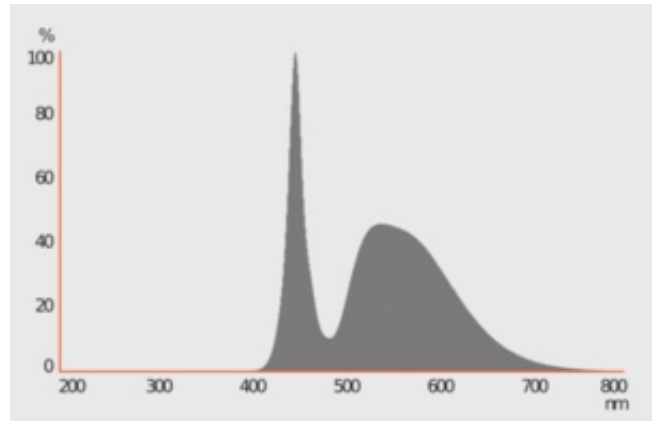


LISO spectral power distribution 6500K CRI80 v2

Light technical data

Beam angle	200 °
Warm-up time (60 %)	0.50 s
Starting time	< 0.5 s

Dimensions & Weight



Overall length	118.00 mm
Diameter	60.00 mm

Maximum diameter	60 mm
Product weight	33.00 g

### Temperatures & operating conditions

Ambient temperature range	-20...+40 °C
Maximum temperature at tc test point	91 °C

### Lifespan

Lifespan L70/B50 at 25 °C	10000 h
Number of switching cycles	100000
Lumen maintenance at end of service lifetime	0.70
Rated lamp survival factor at 6,000 h	≥ 0.90

### Additional product data

Base (standard designation)	E27
Mercury content	0.0 mg
Mercury-free	Yes
Design / version	Frosted
Product remark	All technical parameters apply to the entire lamp / Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

### Capabilities

Dimmable	No
----------	----

### Certificates & Standards

Energy efficiency class	F 1)
Energy consumption	13.00 kWh/1000h
Type of protection	IP20
Standards	ROHS 2.0 / REACH / CE / CB / ERP
Photobiological safety group acc. to EN62778	RG0

1) Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)

### Country-specific categorizations

ILCOS	DRAA/F-14/840-220-240-E27-60
Order reference	VALUECLA100 13W


## LOGISTICAL DATA








Temperature range at storage	-20...+80 °C
------------------------------	--------------

## Energy labelling regulation data acc EU 2019/2015

Lighting technology used	LED
Non-directional or directional	NDLS
Mains or non-mains	MLS
Light source cap-type (or other electric interface)	E27
Connected light source (CLS)	No
Color-tuneable light source	No
Envelope	No
High luminance light source	No
Anti-glare shield	No
Correlated colour temperature type	SINGLE_VALUE
Standby power	0.00
Claim of equivalent power	Yes
Length	118.00 mm
Height	60.00 mm
Width	60.00 mm
Chromaticity coordinate x	0.458
Chromaticity coordinate y	0.410
R9 Colour rendering index	0.00
Beam angle correspondence	SPHERE_360
Survival factor	0.90
Displacement factor	0.70
LED light source replaces a fluorescent light source	No
EPREL ID	1403211,523299,1381372,1857033,1855168
Model number	AC31141,AC44921,AC24695,AC56441,AC55989

## DOWNLOAD DATA

Documents and certificates	Document name
 Declarations of conformity	EC Declaration of Conformity CLA Non Dim AC31141-56 AC31177-9 AC34531-3

Photometric and lighting design files	Document name
 IES file (IES)	AC08356_CLA100 13W 230VFR E27
 LDT file (Eulumdat)	AC08923_CLA100 14W 230VFR E27
 UGR file (UGR table)	VALUECLA100 13W 827 230VFR E27 FS1 OSRAM
 LDC typ cone	VALUECLA100 13W 827 230VFR E27 FS1 OSRAM
 LDC typ polar	VALUECLA100 13W 827 230VFR E27 FS1 OSRAM
 Spectral power distribution	349927_2700K_Evl_5630.eps
 Spectral power distribution	LISO spectral power distribution 6500K CRI80 v2

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4052899971097	Folding box 1	60 mm x 60 mm x 127 mm	50.00 g	0.46 dm <sup>3</sup>
4052899971189	Shipping box 10	315 mm x 132 mm x 141 mm	660.00 g	5.86 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.